US011712381B2

(12) **United States Patent**
Malcolm et al.

(10) **Patent No.: US 11,712,381 B2**
(45) **Date of Patent: Aug. 1, 2023**

(54) **MILITARY VEHICLE WITH RECONFIGURABLE COMPARTMENT**

(71) Applicant: **Oshkosh Corporation**, Oshkosh, WI (US)

(72) Inventors: **Gregory D. Malcolm**, Oshkosh, WI (US); **Matthew B. Vetting**, Oshkosh, WI (US); **Rodney M. Miller**, Oshkosh, WI (US)

(73) Assignee: **Oshkosh Corporation**, Oshkosh, WI (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **17/477,309**

(22) Filed: **Sep. 16, 2021**

(65) **Prior Publication Data**

US 2022/0000686 A1 Jan. 6, 2022

Related U.S. Application Data

(63) Continuation-in-part of application No. 17/398,754, filed on Aug. 10, 2021, now Pat. No. 11,285,058, which is a continuation of application No. 17/078,401, filed on Oct. 23, 2020.

(60) Provisional application No. 62/925,512, filed on Oct. 24, 2019.

(51) **Int. Cl.**
A61G 3/08 (2006.01)

(52) **U.S. Cl.**
CPC ***A61G 3/085*** (2013.01); ***A61G 3/0825*** (2013.01); ***A61G 3/0833*** (2013.01); ***A61G 3/0841*** (2013.01); ***A61G 3/0858*** (2013.01); ***A61G 3/0866*** (2013.01); *A61G 2203/70* (2013.01)

(58) **Field of Classification Search**
CPC B60P 3/42; B60P 3/423; B62D 33/046
USPC 296/10, 26.01, 181.7, 186.5, 24.33
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

882,012	A	3/1908	Morris	
1,178,360	A	4/1916	Tudor	
1,263,918	A	4/1918	Miller	
2,361,328	A	10/1944	Springer	
2,473,364	A	6/1949	Dickinson et al.	
3,358,300	A	12/1967	Smith	
3,508,787	A *	4/1970	Strong	B60P 3/42 114/352
3,512,828	A *	5/1970	Johnt	B60P 3/34 296/100.07

(Continued)

FOREIGN PATENT DOCUMENTS

CN	107672513		2/2018
EP	162587	A *	11/1985

(Continued)

Primary Examiner — Hilary L Gutman
(74) *Attorney, Agent, or Firm* — Foley & Lardner LLP

(57) **ABSTRACT**

A reconfigurable compartment for a military vehicle. The reconfigurable compartment includes a floor, a front, a rear, a roof, and sides. The floor, the front, the rear, the roof, and the sides are removably coupled with each other to define the reconfigurable compartment. At least one of the floor, the front, the rear, the roof, or the sides are function-specific and replaceable with a different function-specific at least one of the floor, the front, the rear, the roof, or the sides and thereby facilitate transitioning an overall function of the military vehicle to accommodate a variety of different vehicle applications.

17 Claims, 13 Drawing Sheets

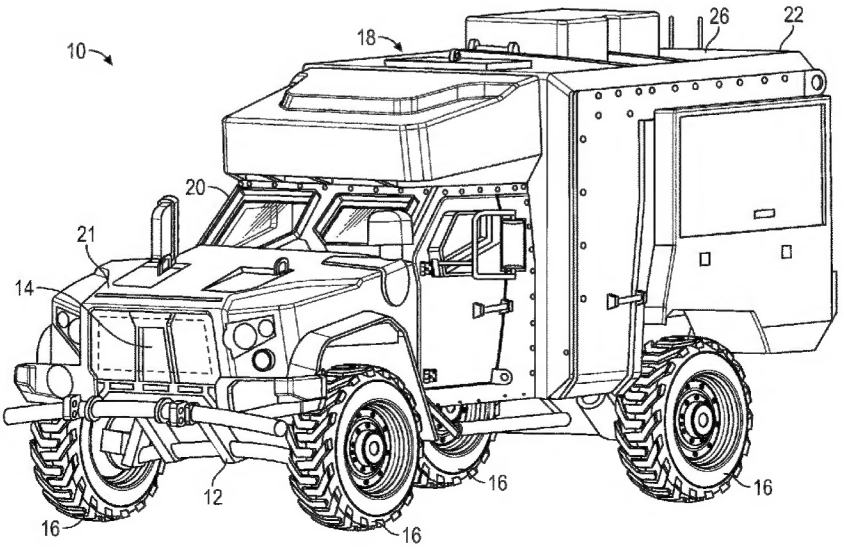

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,574,871	A	4/1971	Greene	
3,701,395	A	10/1972	Theobald	
3,751,103	A *	8/1973	Robertson	B60P 3/36 296/156
3,986,459	A	10/1976	Riley	
D250,012	S *	10/1978	Windecker	D12/404
4,221,423	A *	9/1980	Stone	B60J 7/041 296/210
4,617,706	A	10/1986	Waletzko	
4,799,726	A *	1/1989	Scott	B60J 7/106 296/100.09
4,848,830	A *	7/1989	Parson	B60P 3/32 296/26.05
D324,015	S *	2/1992	Quiniones	D12/404
D325,551	S *	4/1992	Quiniones	D12/404
5,372,339	A	12/1994	Morgan	
5,411,450	A	5/1995	Gratton et al.	
5,529,376	A *	6/1996	Jovan	B60N 2/015 297/248
6,024,528	A	2/2000	Taylor	
6,186,575	B1 *	2/2001	Fisher	B62D 47/003 296/100.02
6,644,708	B1 *	11/2003	Grzegorzewski	B60P 1/43 296/10
7,028,351	B1	4/2006	Frieder et al.	
7,452,027	B2 *	11/2008	Hensler	B60P 3/42 296/183.1
7,883,133	B2	2/2011	Chinn	
8,205,703	B2 *	6/2012	Halliday	B62D 63/025 180/89.1
8,408,623	B1 *	4/2013	McAuliff	B60J 7/11 296/24.33
8,602,475	B2 *	12/2013	Fletcher	A61G 3/085 296/19
8,733,826	B1 *	5/2014	Montone	B62D 65/06 296/193.04
8,840,163	B1 *	9/2014	Wilhelm	B60N 2/42736 296/19
9,008,913	B1	4/2015	Sears et al.	
9,017,003	B2	4/2015	Nims et al.	
9,045,014	B1	6/2015	Verhoff et al.	
9,174,686	B1	11/2015	Oshkosh	
9,611,975	B2	4/2017	Chinn et al.	
9,656,590	B2	5/2017	Johnson et al.	
9,707,869	B1	7/2017	Messina et al.	
10,099,598	B2 *	10/2018	Gurin	B62D 39/00
11,059,526	B2 *	7/2021	Gallagher	B62D 33/037
2003/0168874	A1 *	9/2003	Bautista, Jr.	B60P 3/42 296/10
2004/0002794	A1	1/2004	Pillar et al.	
2005/0113996	A1	5/2005	Pillar et al.	
2005/0234622	A1	10/2005	Pillar et al.	
2008/0114513	A1	5/2008	Pillar et al.	
2009/0014602	A1	1/2009	Frost	
2009/0072564	A1 *	3/2009	Teeple	B60P 3/42 296/10
2010/0132113	A1 *	6/2010	Roepke	A47C 17/84 5/10.1
2012/0006873	A1	1/2012	Chinn	
2014/0227892	A1	8/2014	Chinn	
2014/0255136	A1	9/2014	Malcolm et al.	
2015/0210313	A1	7/2015	Sears et al.	
2015/0239387	A1	8/2015	Marasco et al.	
2017/0028900	A1 *	2/2017	Stocks	B60P 3/42
2017/0296404	A1	10/2017	Burkeen	
2021/0121340	A1	4/2021	Malcolm et al.	
2021/0276423	A1	9/2021	Lombardo et al.	
2021/0276847	A1	9/2021	Neubauer et al.	
2021/0276848	A1	9/2021	Miller et al.	

FOREIGN PATENT DOCUMENTS

EP	1 090 620	4/2001	
FR	2643244 A1 *	8/1990	A47C 17/84
WO	WO-9109751 A1 *	7/1991	B60J 7/194
WO	WO-2012/036726	3/2012	

* cited by examiner

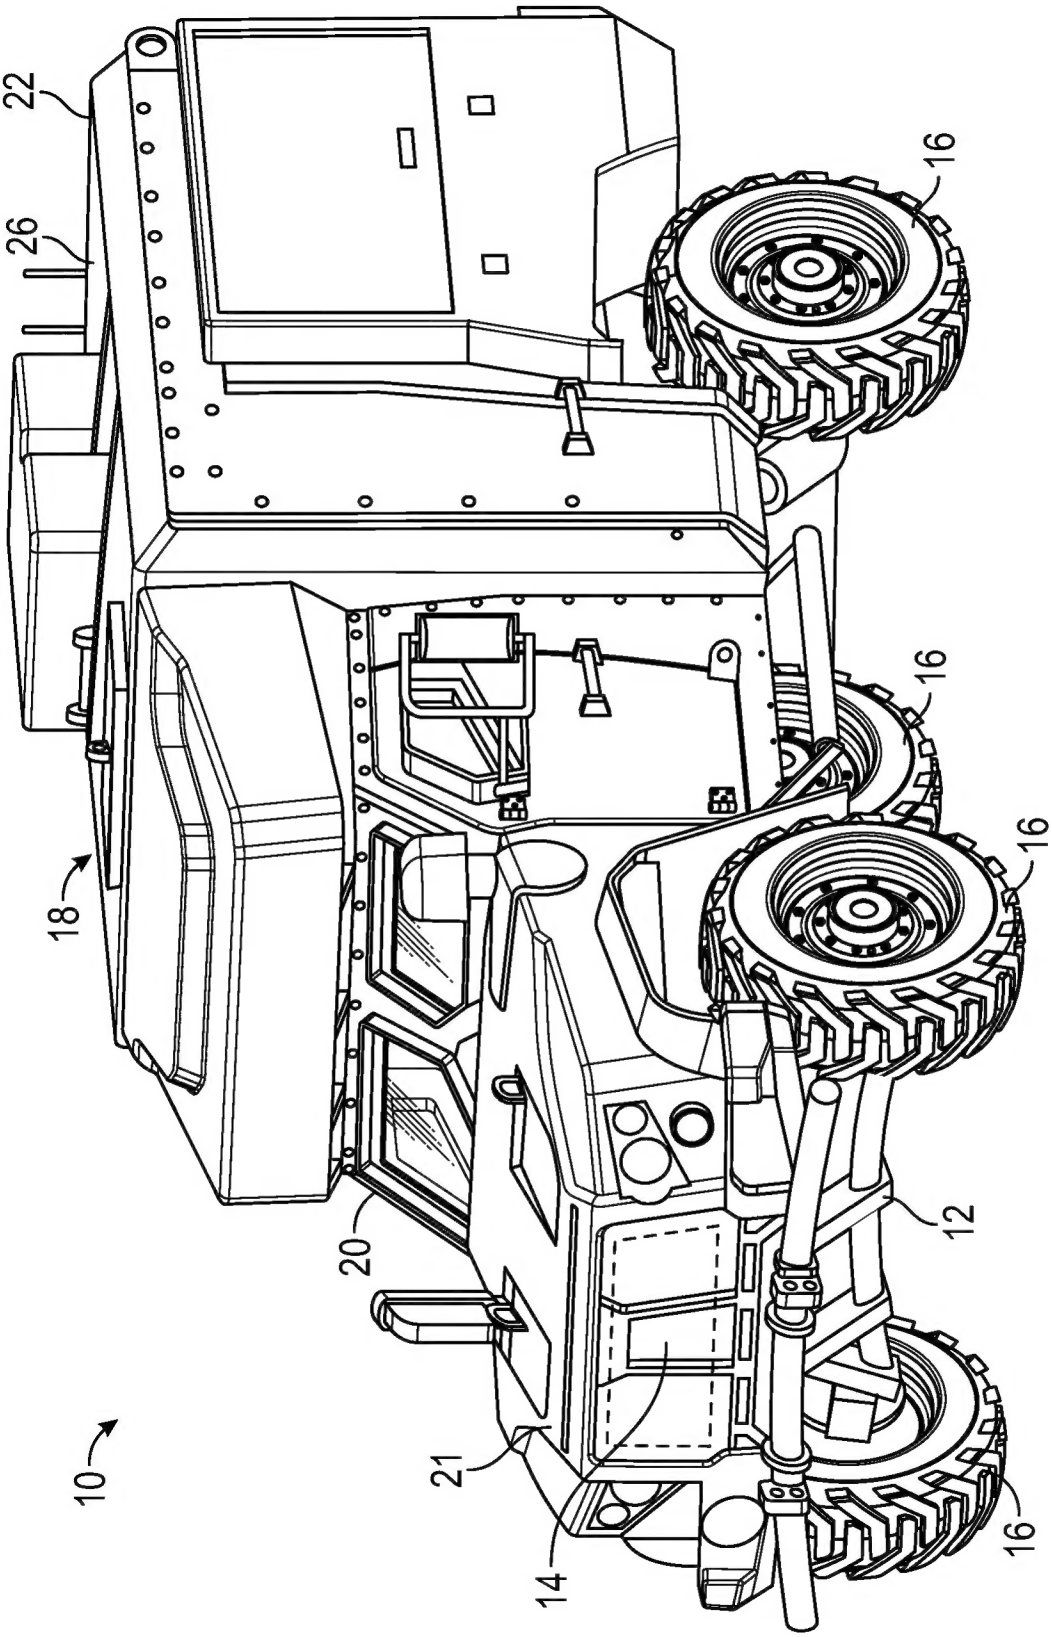

FIG. 1

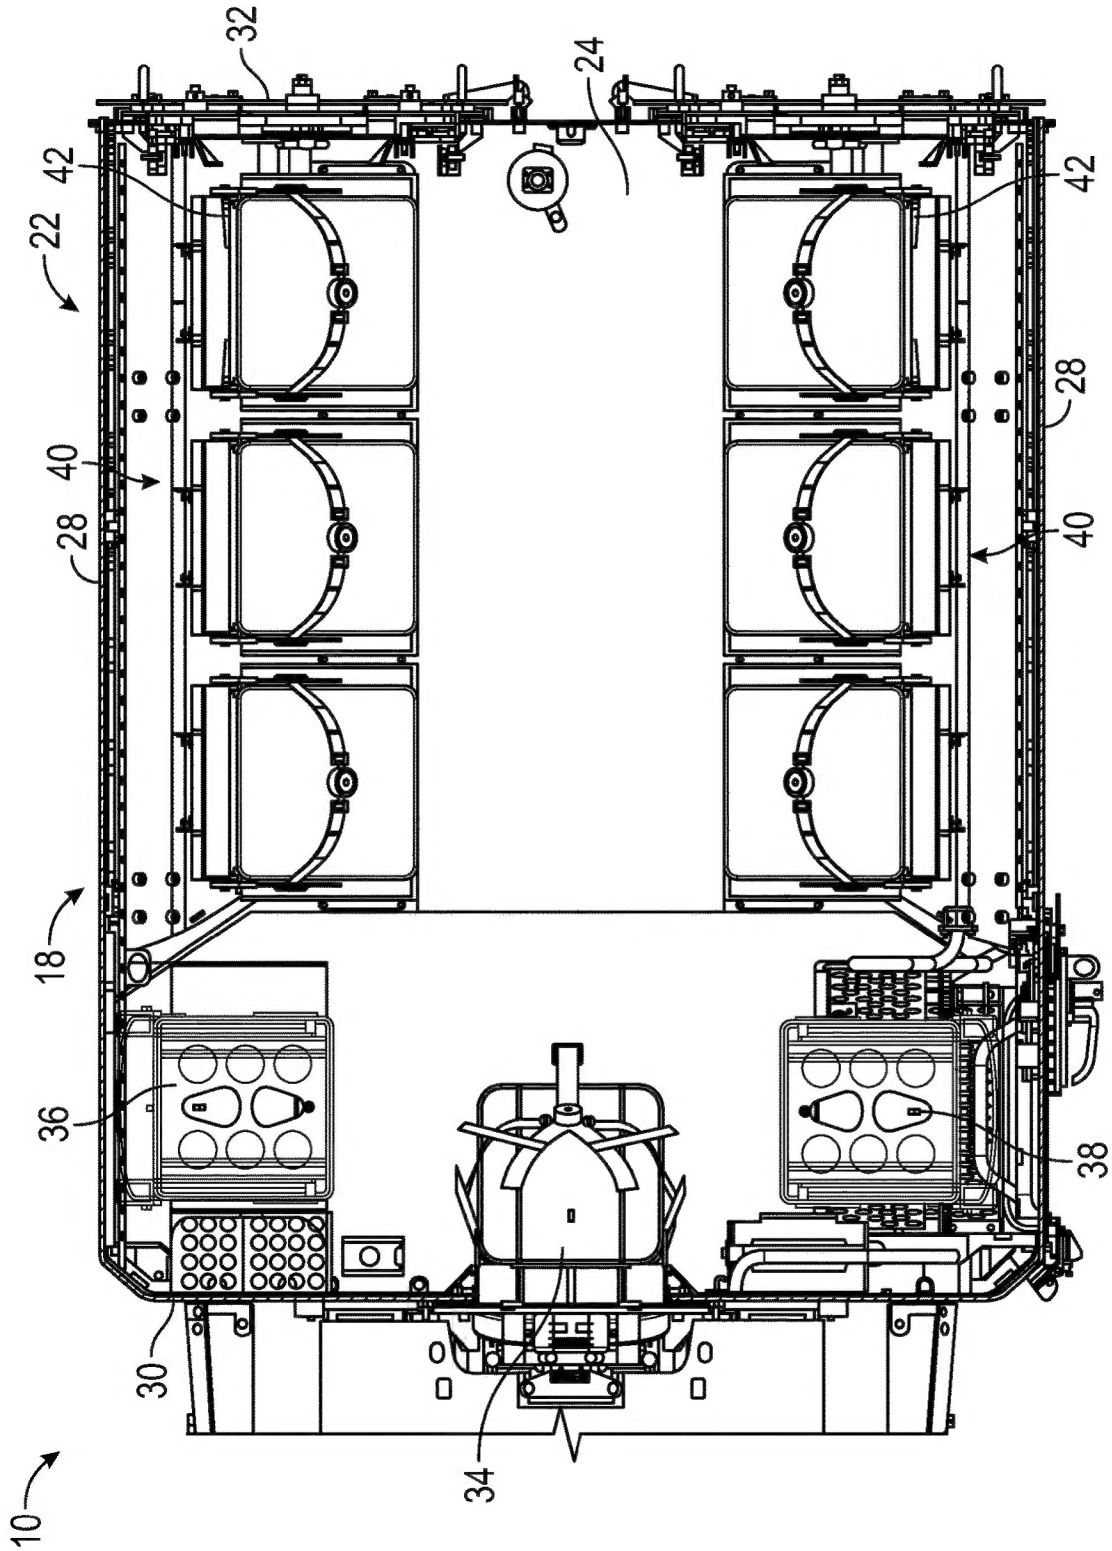

FIG. 2A

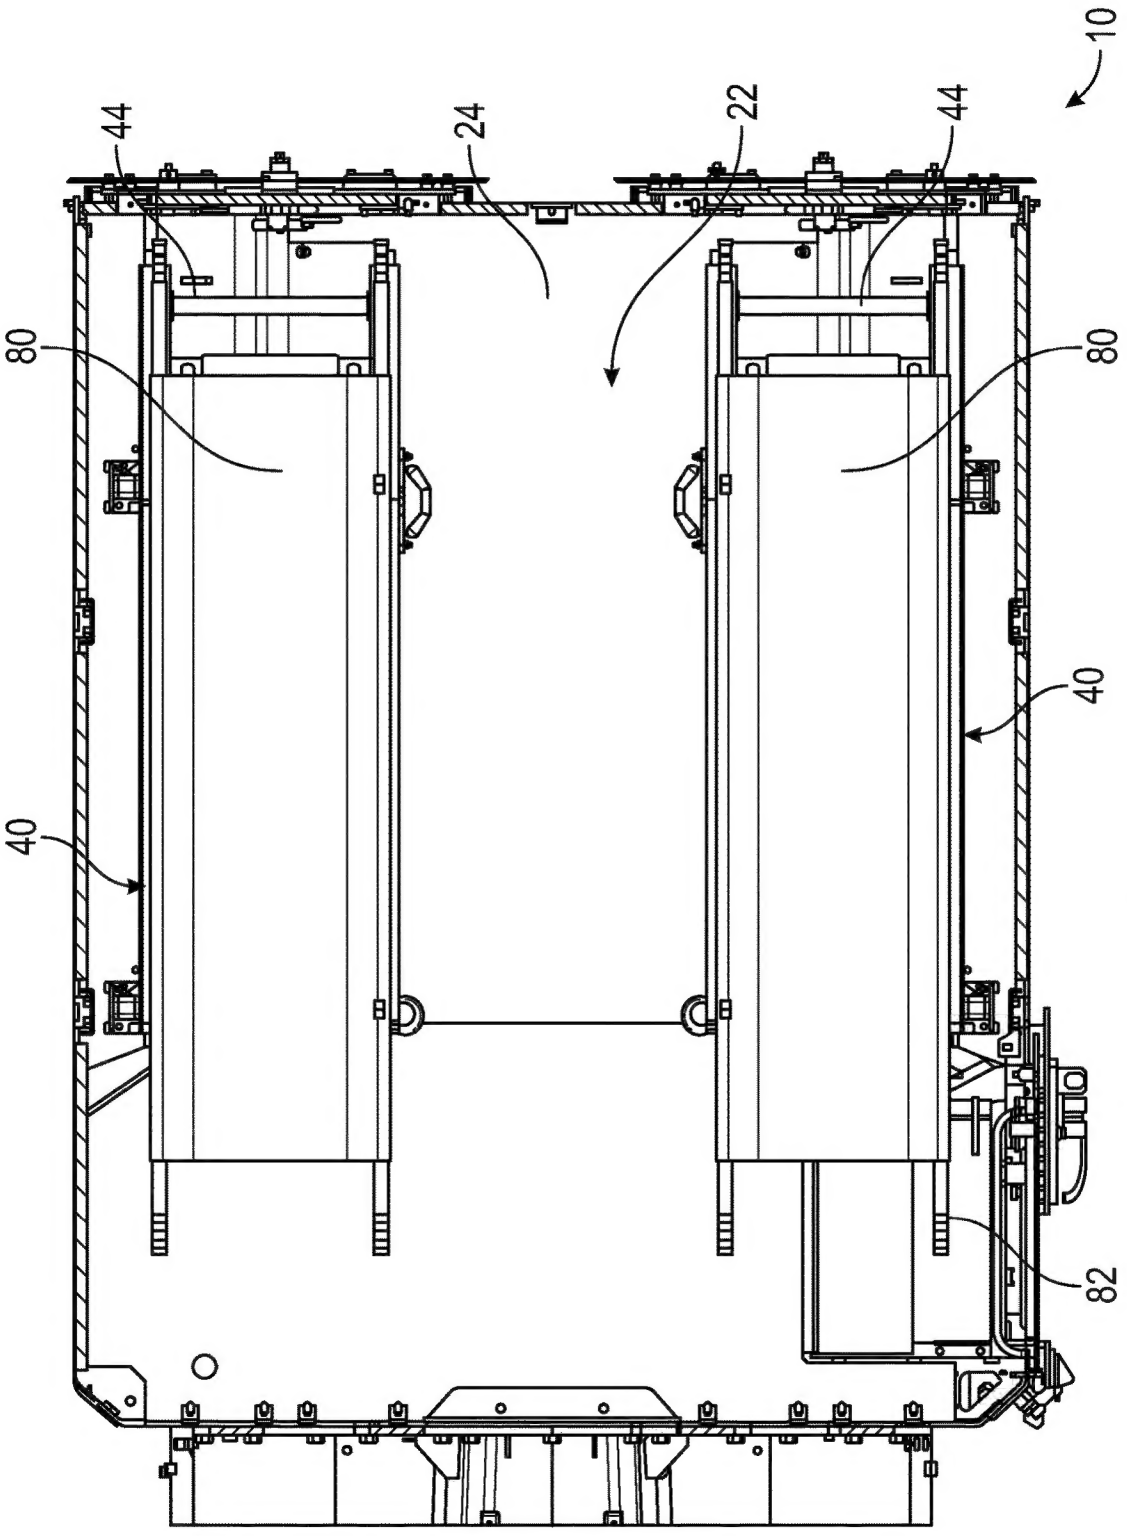

FIG. 2B

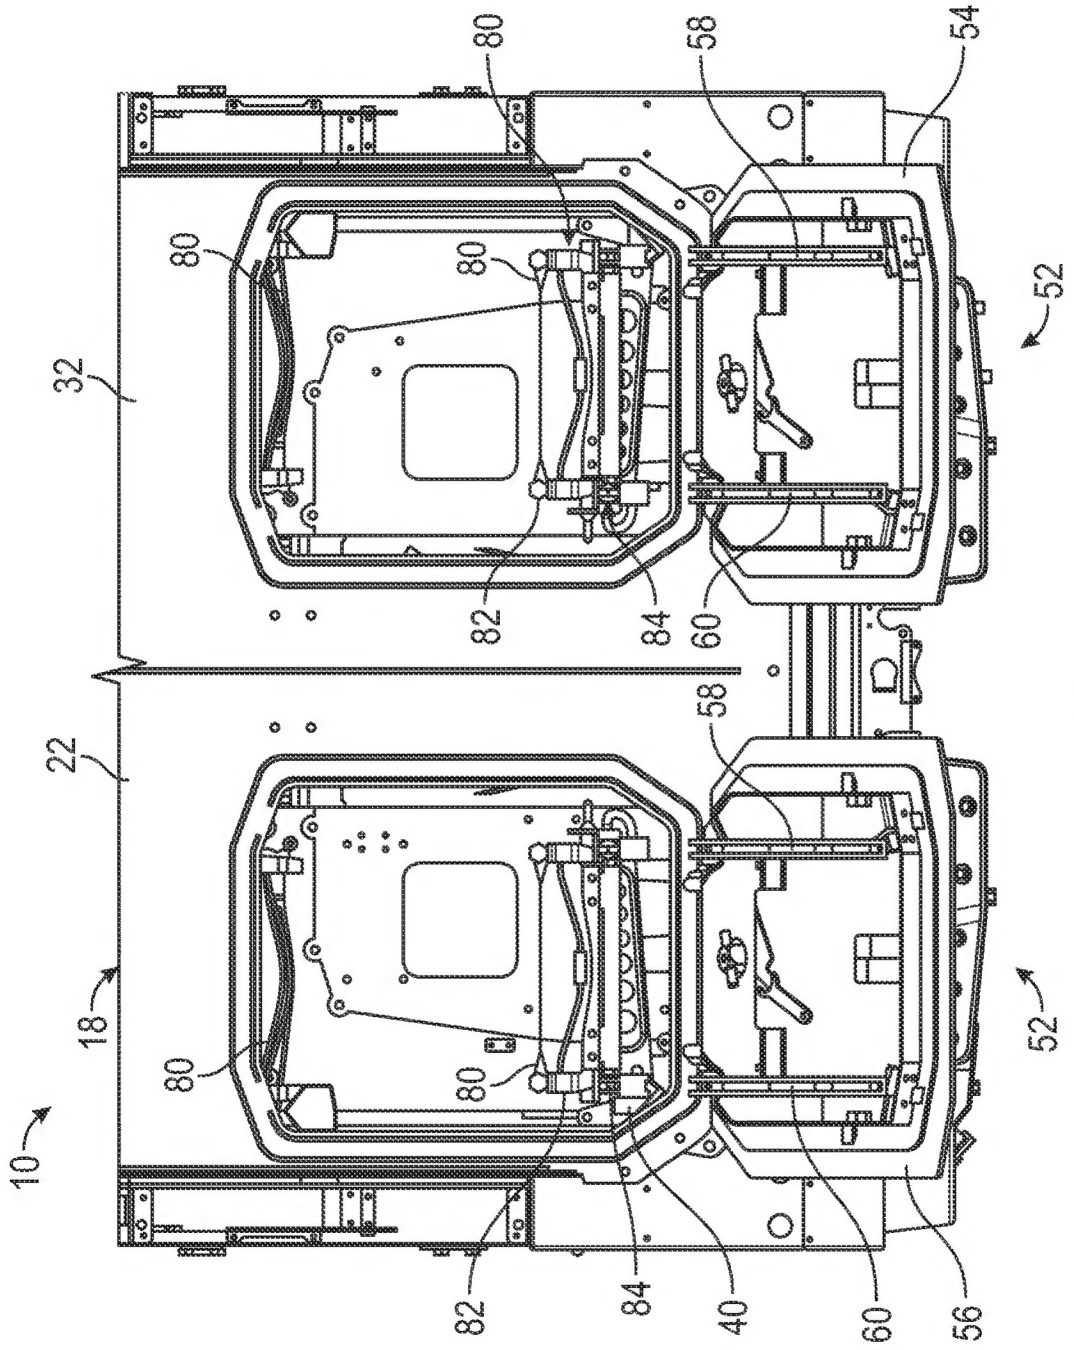

FIG. 3

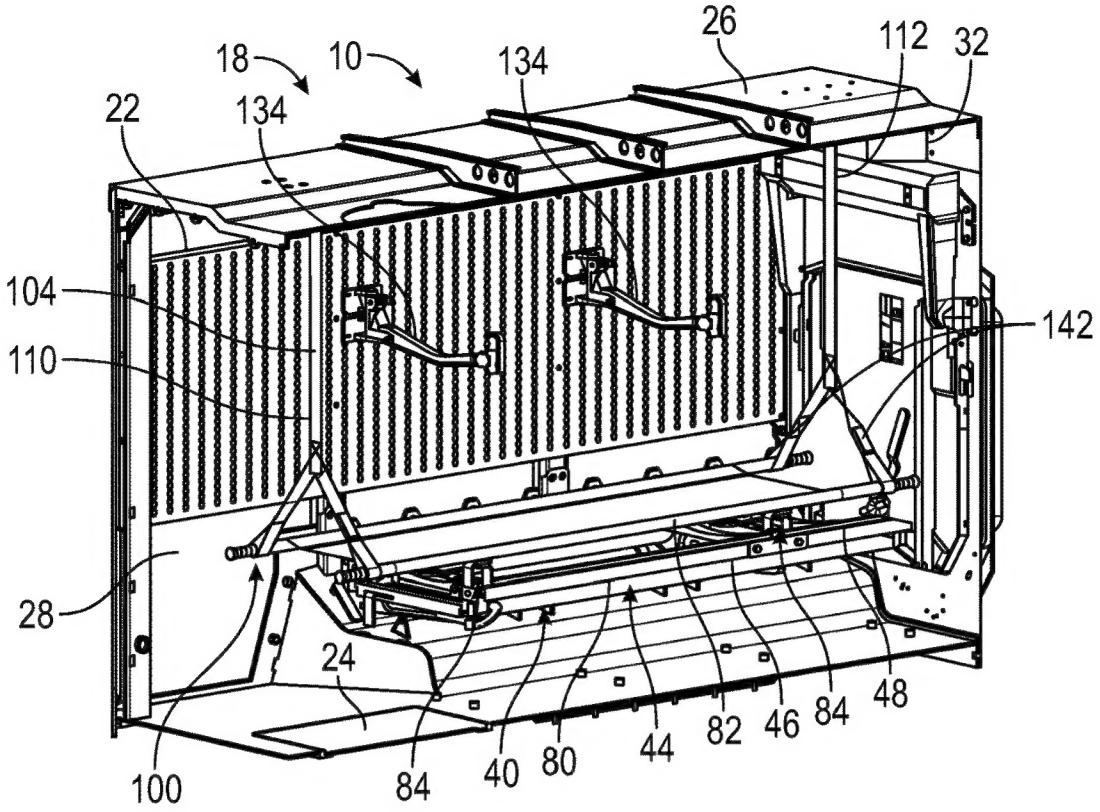
18
10
134
26
112
32
22
134
104
142
110
28
24
100
84
40
80
44
82
46
84
48

FIG. 4A

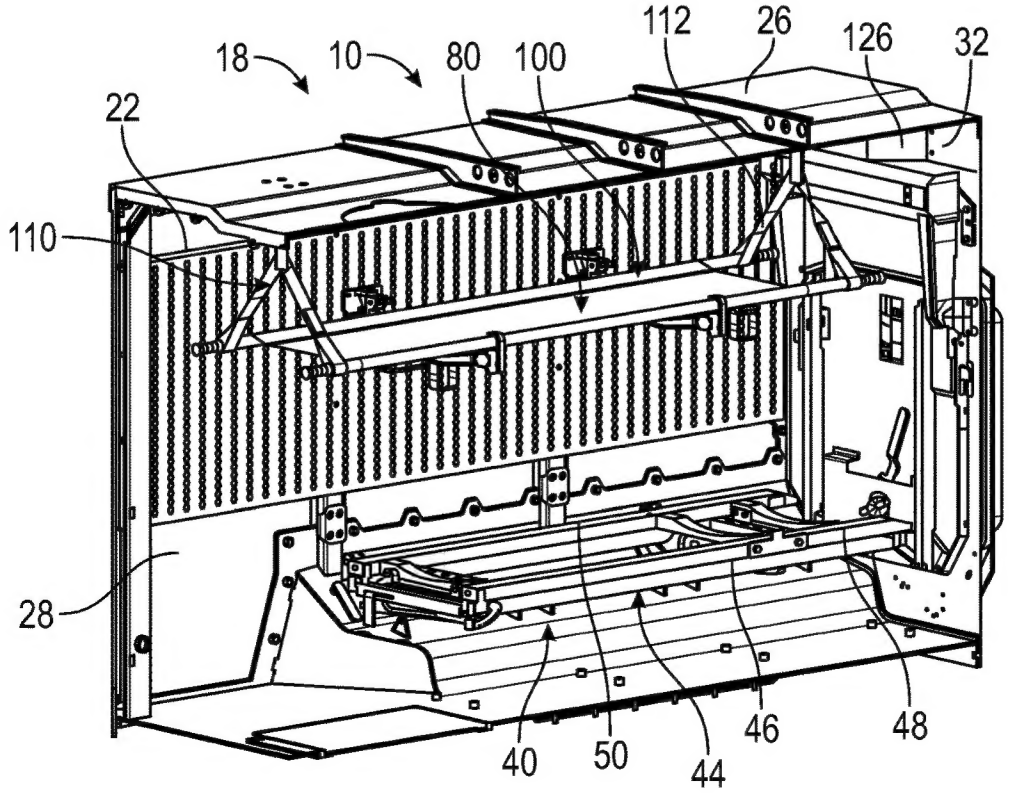
112
26
126
32
18
10
80
100
22
110
28
40
50
44
46
48

FIG. 4B

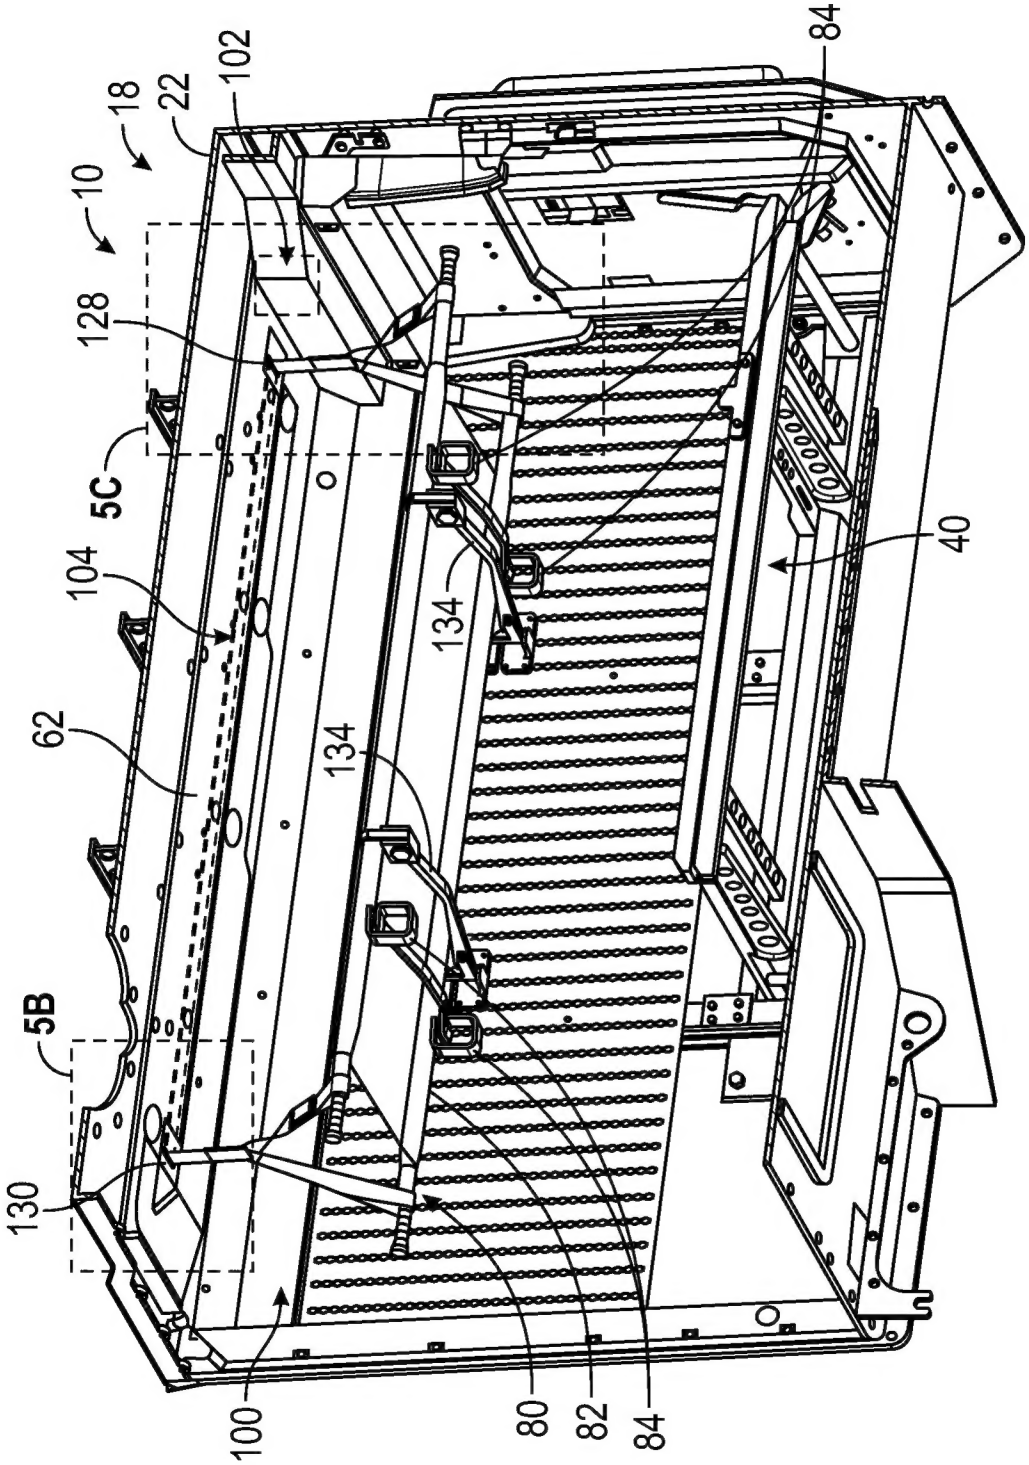

FIG. 5A

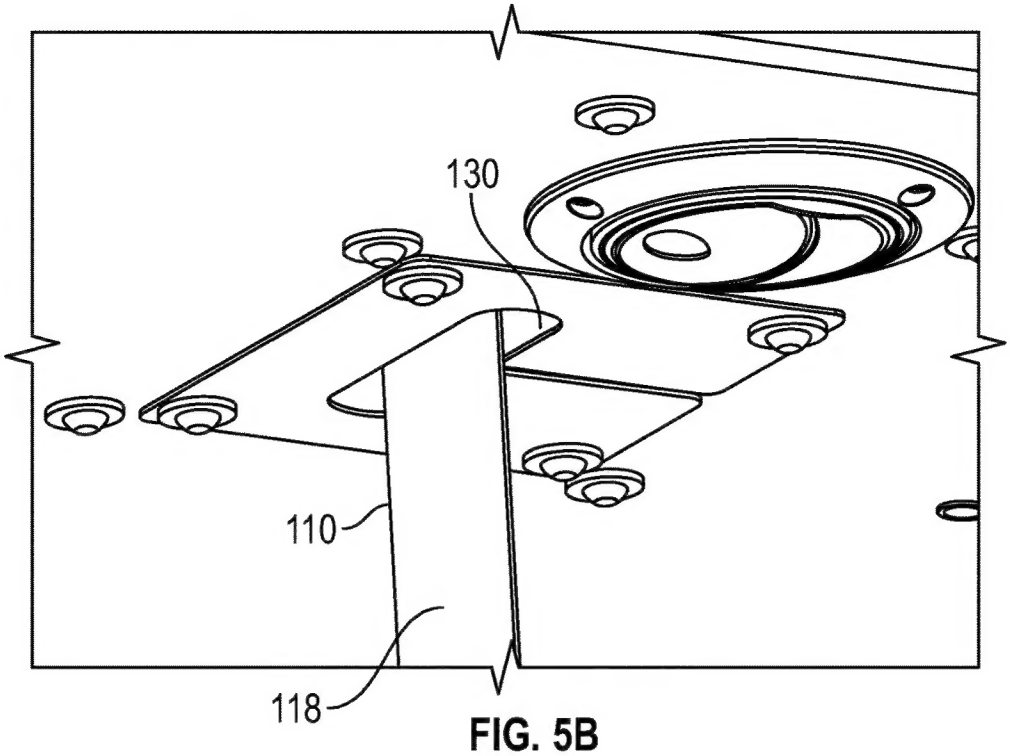

FIG. 5B

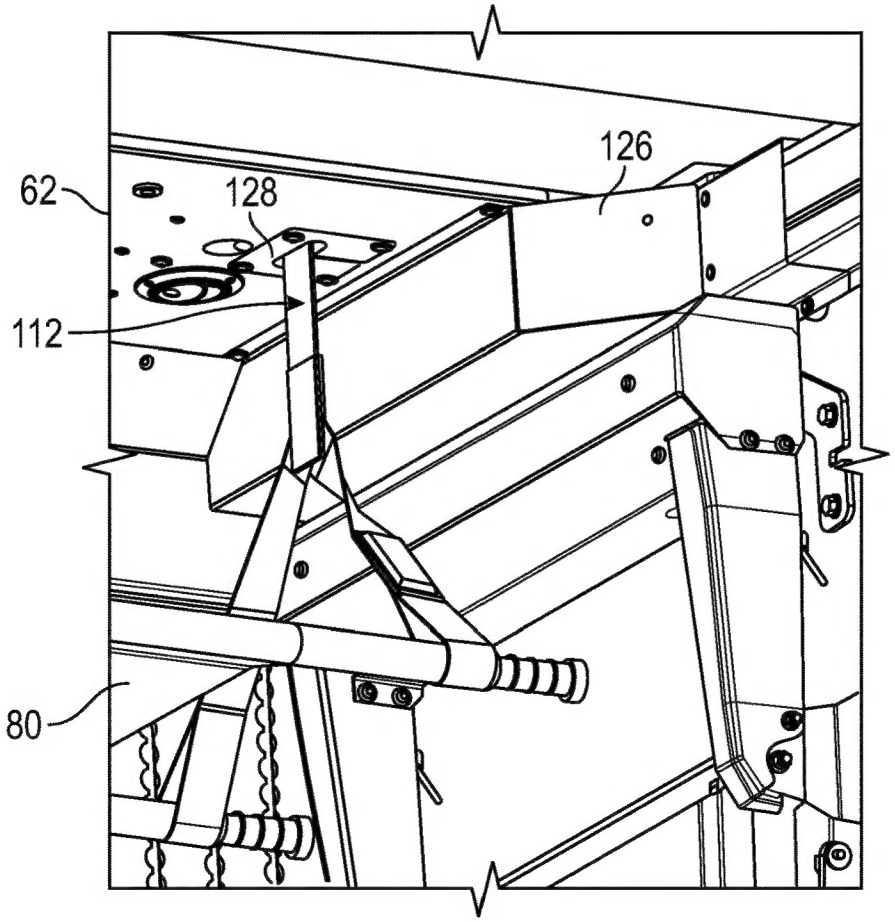

FIG. 5C

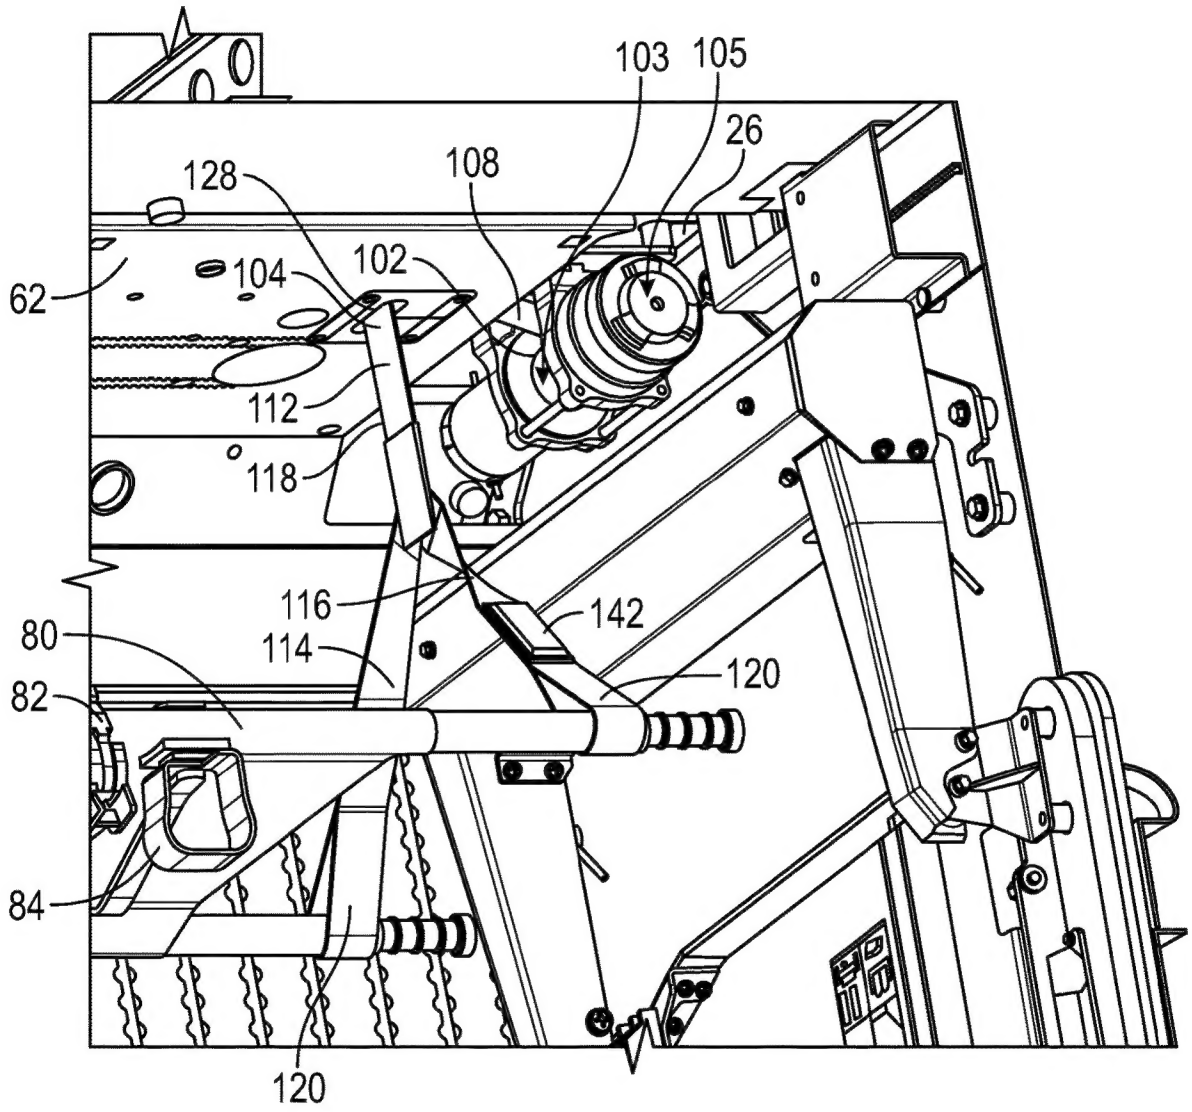

FIG. 6

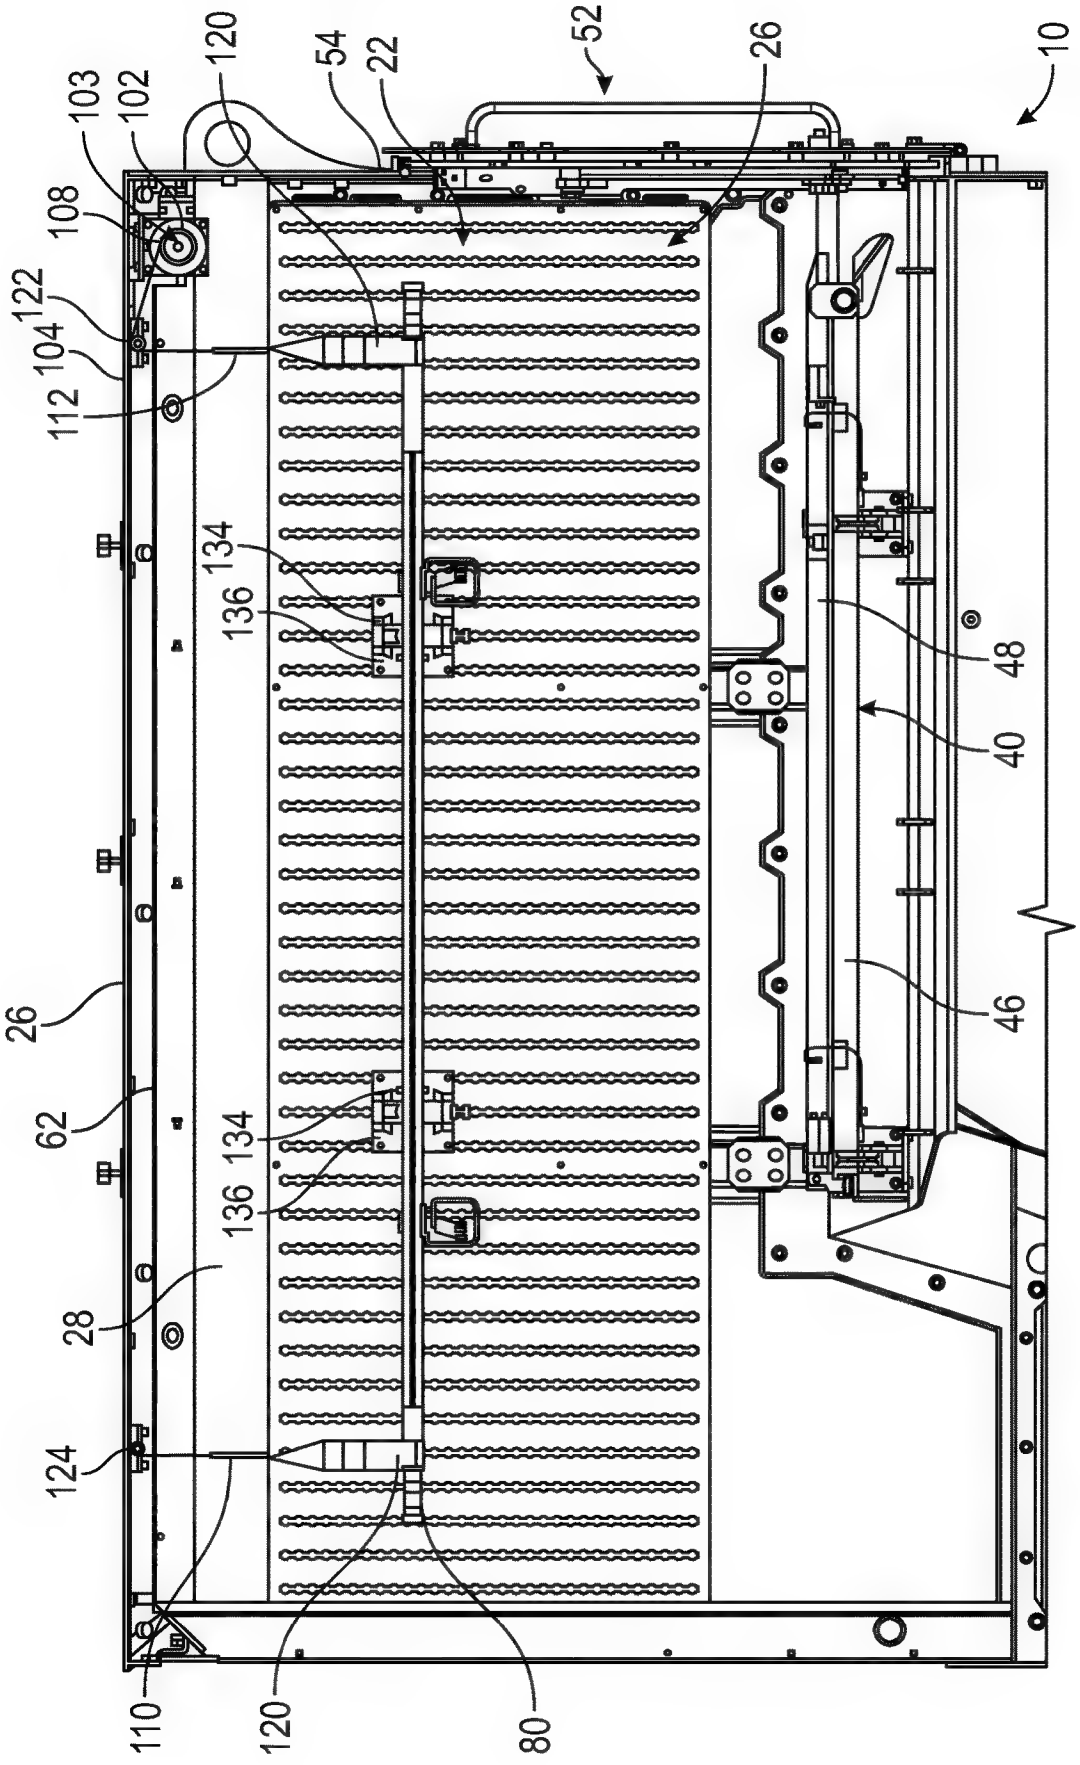
120
54
22
52
26
10
103
102
108
122
104
112
134
136
48
40
46
26
62
134
136
28
124
110
120
80

FIG. 7

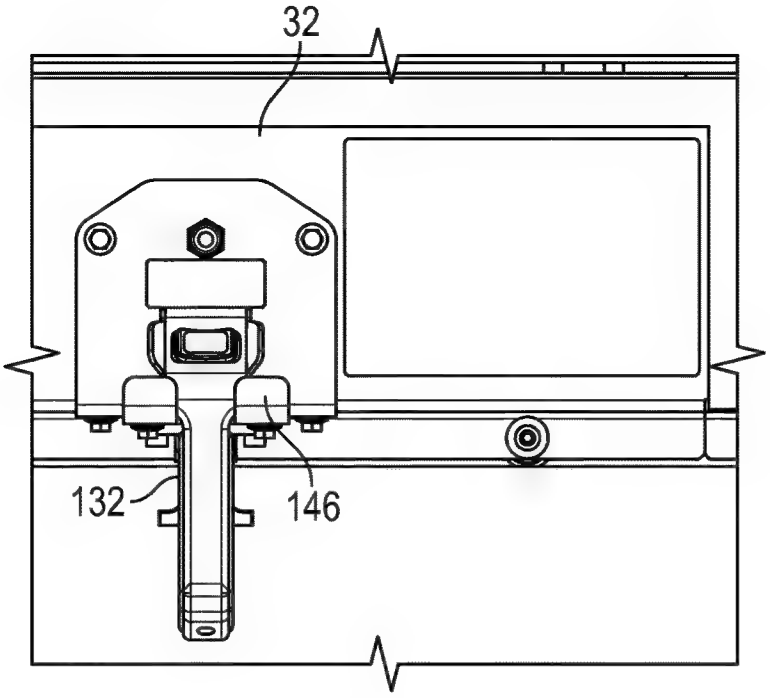

FIG. 8A

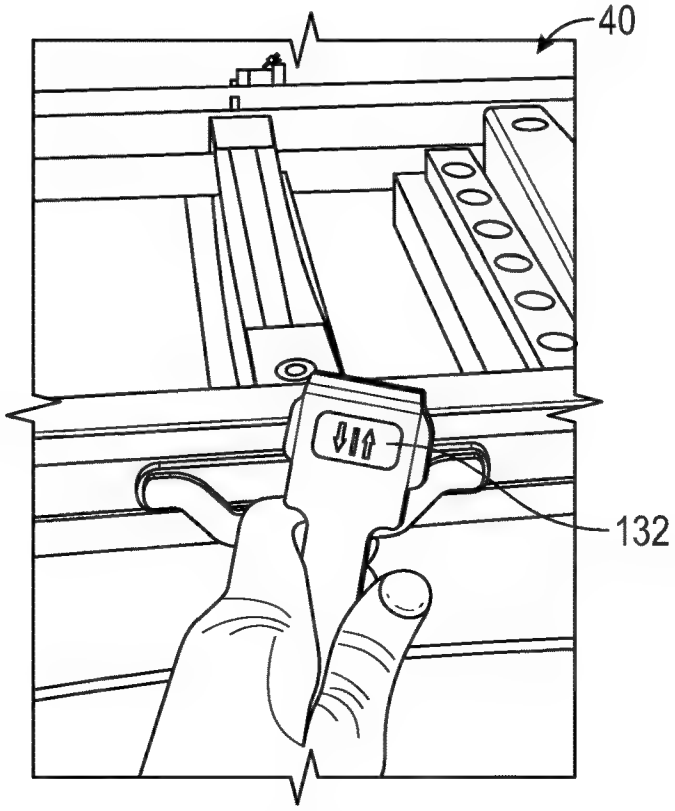

FIG. 8B

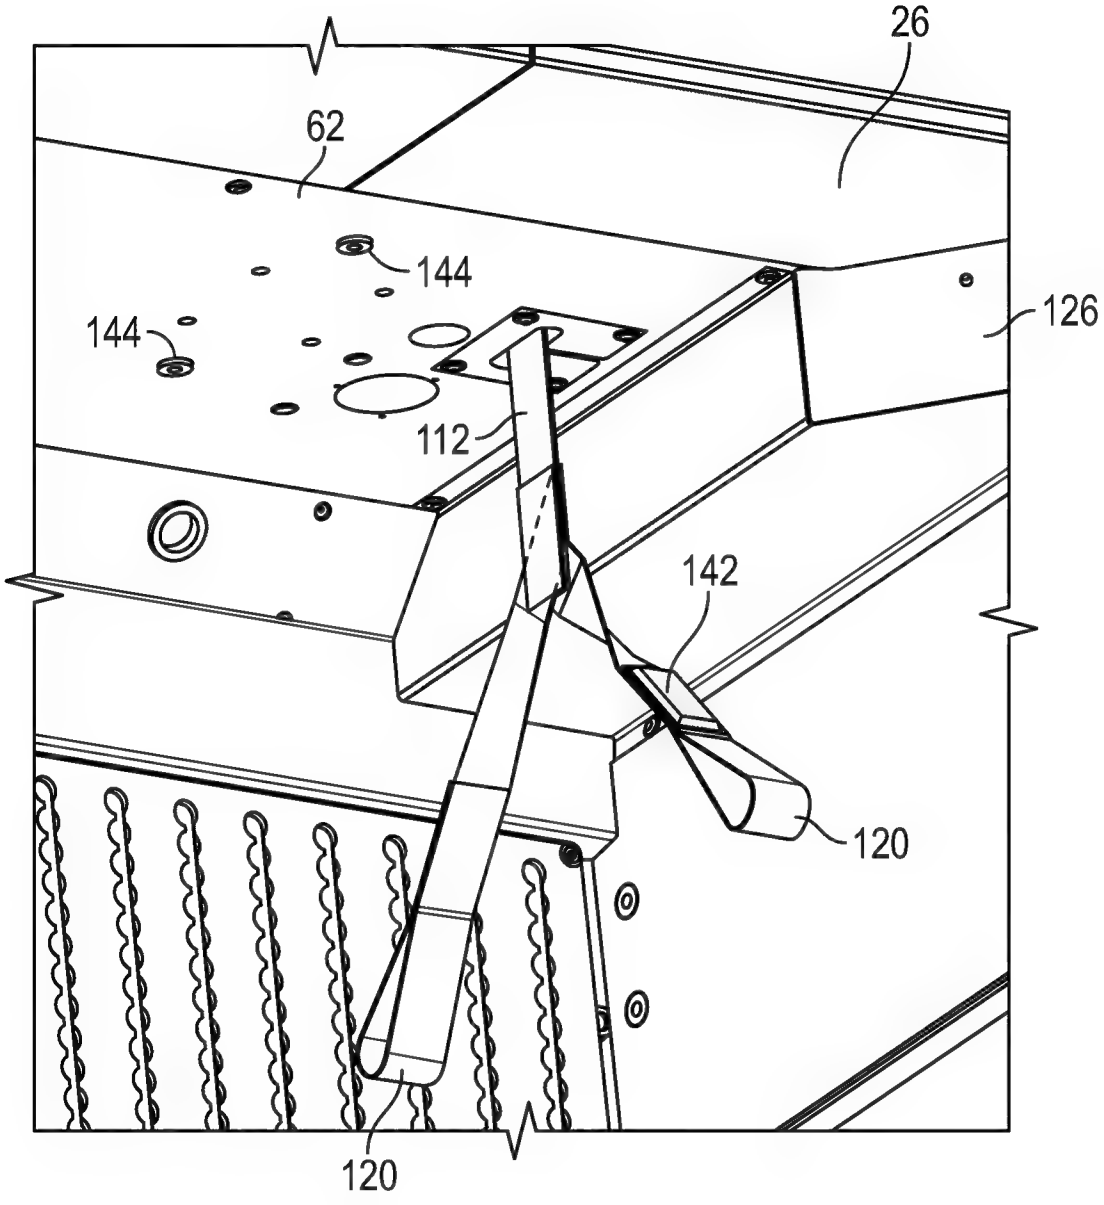

FIG. 9

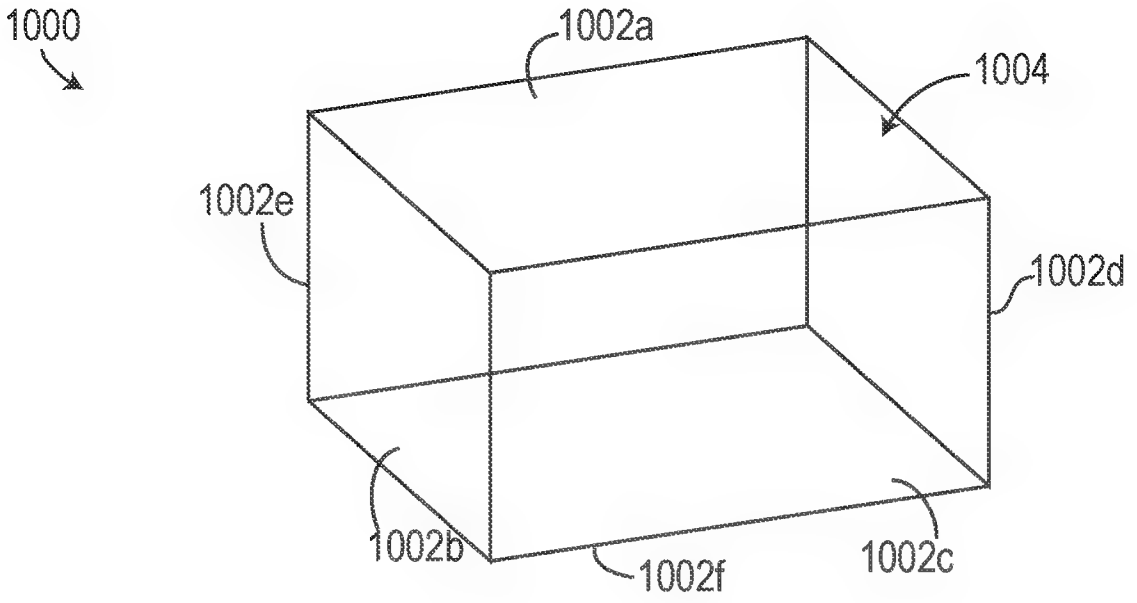
1000
1002a
1004
1002e
1002d
1002b
1002f
1002c

FIG. 10

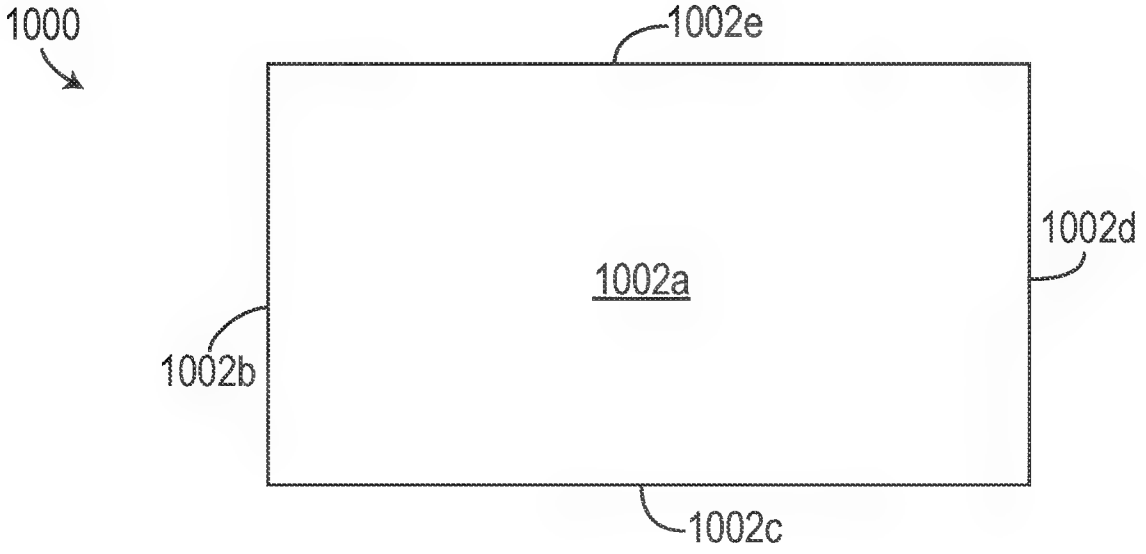
1000
1002e
1002d
1002a
1002b
1002c

FIG. 11

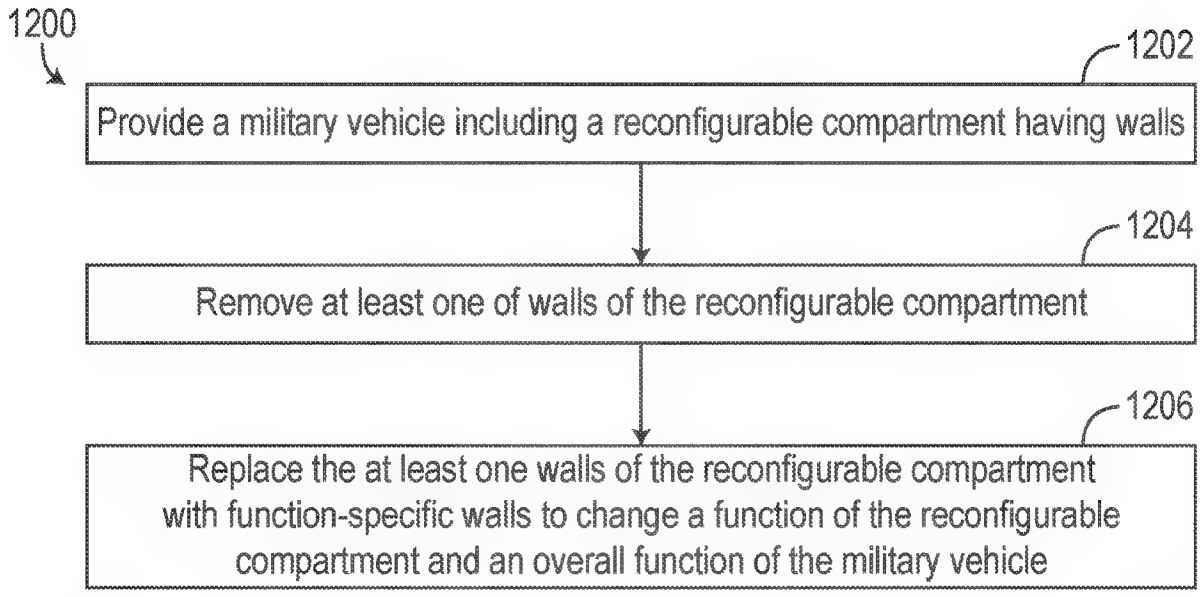
1200
1202
Provide a military vehicle including a reconfigurable compartment having walls
1204
Remove at least one of walls of the reconfigurable compartment
1206
Replace the at least one walls of the reconfigurable compartment with function-specific walls to change a function of the reconfigurable compartment and an overall function of the military vehicle

FIG. 12

MILITARY VEHICLE WITH RECONFIGURABLE COMPARTMENT

CROSS-REFERENCE TO RELATED APPLICATION

This application is a continuation-in part of U.S. patent application Ser. No. 17/398,754, filed Aug. 10, 2021, which is a continuation of U.S. patent application Ser. No. 17/078,401, filed Oct. 23, 2020, which claims priority to U.S. Provisional Patent Application No. 62/925,512, filed Oct. 24, 2019, all of which are hereby incorporated by reference in their entireties.

BACKGROUND

Ambulance-type vehicles typically include a mechanism to position and secure a stretcher or "litter" to the floor of the vehicle. The ambulance-type vehicles are typically designed to accommodate one sick, injured, or wounded person away from an event. Occasionally, an ambulance must transport several wounded or injured personnel away from an event simultaneously.

SUMMARY

One exemplary embodiment relates to a military vehicle. The military vehicle includes a frame, and a vehicle body. The vehicle body is supported by the frame and includes a compartment having multiple panels. The multiple panels removably coupled to cooperatively define the vehicle body. At least one of the plurality of panels of the compartment are replaceable and thereby facilitate transitioning an overall function of the military vehicle to accommodate a variety of different vehicle applications.

Another exemplary embodiment relates to a reconfigurable compartment for a military vehicle. The reconfigurable compartment includes a floor, a front, a rear, a roof, and sides. The floor, the front, the rear, the roof, and the sides are removably coupled with each other to define the reconfigurable compartment. At least one of the floor, the front, the rear, the roof, or the sides are function-specific and replaceable with a different function-specific at least one of the floor, the front, the rear, the roof, or the sides to change an overall function of the military vehicle between a plurality of overall functions.

Another exemplary embodiment relates to a method of transitioning a military vehicle between a plurality of different modes. The method includes providing a military vehicle including a reconfigurable compartment having a floor, a front, a rear, a roof, and sides. The front, the rear, the roof, and the sides are removably coupled with each other to define the reconfigurable compartment. The method includes removing a function-specific one of the floor, the front, the rear, the roof, or the sides. The method also includes replacing the function-specific one of the floor, the front, the rear, the roof, or the sides with a different function-specific one of the floor, the front, the rear, the roof, or the sides to transition the military vehicle between the plurality of different modes.

The invention is capable of other embodiments and of being carried out in various ways. Alternative exemplary embodiments relate to other features and combinations of features as may be recited herein.

BRIEF DESCRIPTION OF THE FIGURES

The disclosure will become more fully understood from the following detailed description, taken in conjunction with the accompanying figures, wherein like reference numerals refer to like elements, in which:

FIG. **1** is a perspective view of a vehicle, according to an exemplary embodiment;

FIGS. **2**A and **2**B are top views of the vehicle of FIG. **1**, with a portion of a vehicle body removed to depict internal components, according to an exemplary embodiment;

FIG. **3** is a rear view of the vehicle of FIG. **1**;

FIG. **4**A is an interior perspective cross-sectional view of the vehicle of FIG. **1**, taken along line **4**-**4** in FIG. **1**, with a litter lift system of the vehicle in a lowered position;

FIG. **4**B is an interior perspective cross-sectional view of the vehicle of FIG. **1**, taken along line **4**-**4** in FIG. **1**, with the litter lift system of the vehicle in a raised position;

FIG. **5**A is another interior perspective view of the vehicle of FIG. **1**;

FIG. **5**B is a detailed view of a front strap interface formed within the vehicle body of the vehicle of FIG. **1**, taken from the section **5**B in FIG. **5**A;

FIG. **5**C is a detailed view of a rear strap interface and a winch housing formed within the vehicle body of the vehicle of FIG. **1**, taken from the section **5**C in FIG. **5**A;

FIG. **6** is a perspective view of a winch system incorporated into the litter lift system of FIG. **4**A, with the winch housing of FIG. **5**C removed;

FIG. **7** is a cross-sectional view of a passenger compartment of the vehicle of FIG. **1**;

FIG. **8**A is a front view of a controller used to control the litter lift system of FIG. **4**A;

FIG. **8**B is a perspective view of the controller of FIG. **8**A;

FIG. **9** is a perspective view of a strap of the litter lift system of FIG. **4**A;

FIG. **10** is a perspective view of a reconfigurable compartment for the vehicle of FIG. **1**, according to an exemplary embodiment;

FIG. **11** is a top view of the reconfigurable compartment of FIG. **10**; and

FIG. **12** is a flow diagram of a process for transitioning a military vehicle between different overall modes by replacing one or more walls of a reconfigurable compartment of the military vehicle, according to an exemplary embodiment.

DETAILED DESCRIPTION

Before turning to the figures, which illustrate the exemplary embodiments in detail, it should be understood that the present application is not limited to the details or methodology set forth in the description or illustrated in the figures. It should also be understood that the terminology is for the purpose of description only and should not be regarded as limiting.

Referring to the FIGURES generally, the various exemplary embodiments disclosed herein relate to a litter lift system adapted for use within a vehicle, such as an ambulance or light tactical military vehicle, which can accommodate and transport several wounded or injured personnel away from an incident simultaneously. In other embodiments, the vehicle is an airplane, a tank, or still another system. In still other embodiments, the litter lift system is provided as part of a building or other non-vehicle system. The litter lift system generally includes a lifting strap that is coupled to a motor-driven winch system that can rotate to adjust a vertical position of two separate lifting segments of the lifting strap at an approximately even rate to suspend and balance a litter above the floor of a vehicle or surface (in the case of a non-vehicle use). Rotation of the winch system

raises or lowers the lifting straps and litters suspended by the lifting straps to maintain the litter in an approximately parallel relationship with the floor of the vehicle below.

The winch system is coupled to or positioned near the roof or ceiling of the vehicle body. A portion of the lifting strap is routed above the ceiling and along (e.g., below) the roof of the vehicle body, outside the passenger compartment. Each lifting segment of the lifting strap is suspended downward, through passageways formed in the ceiling of the vehicle body, and into the passenger compartment where the lifting straps can be coupled to a NATO-style litter or other stretcher-type structure. When coupled to the lifting segments of the lifting strap, rotation of the winch system (in a first direction) raises and suspends the litter from the floor of the vehicle. By suspending the litter off of the floor of the vehicle body, the area of the vehicle below the suspended litter can be used to accommodate additional patients (e.g., on a second litter) or personnel. Otherwise unused vertical space within the vehicle body can be used by the patient suspended by the litter lift system. The vehicle can be outfitted with two identical litter lifting systems positioned on each side of the vehicle body to accommodate four or more litters within the same vehicle simultaneously, with two litters being suspended and two litters being positioned at or near the floor of the vehicle body.

The vehicle may be a military vehicle that includes a reconfigurable compartment. The reconfigurable compartment can include a floor, a front, a rear, a roof, and sides. The floor, the front, the rear, the roof, and the sides are removably coupled with each other to define the reconfigurable compartment. At least one of the floor, the front, the rear, the roof, or the sides are function-specific and replaceable with a different function-specific at least one of the floor, the front, the rear, the roof, or the sides to change an overall function of the military vehicle between a plurality of overall functions. The overall function of the military vehicle can be transitioned between a tactical military vehicle, an ambulance, a troop carrier, a communications vehicle, etc.

Referring now to FIG. **1**, a vehicle, shown as light-tactical vehicle **10** is provided. The vehicle **10** can be an ambulance-style vehicle that is adapted for use in combat situations. The vehicle **10** generally includes a frame, shown as chassis **12**, a prime mover, shown as engine **14**, that is supported by the chassis **12**, and tractive elements, shown as wheels **16** driven by the engine **14** (e.g., through a transmission, a differential, or direct drive). Although shown as an engine **14**, the prime mover can be selected or configured to operate using a variety of different primary fuel sources, including diesel fuel, petroleum, battery power, compressed natural gas, a combination of one or more of these fuel sources, or other suitable fuel sources. In some examples, the prime mover is configured as an electric motor and the chassis **12** supports one or more battery cells (e.g., lithium-ion cells) to power the prime mover.

A vehicle body **18** is supported by the chassis **12**. The vehicle body **18** includes both a cab **20** and a passenger compartment **22**. The cab **20** can generally include vehicle control components, including a steering wheel (or joystick), gas and brake pedals, and a clutch system, for example. The cab **20** can also include seating to accommodate a vehicle driver and one or more passengers. In some autonomous versions of the vehicle **10**, the steering wheel and control pedals are omitted from the cab **20**. A hood **21** of the vehicle **10** extends forward from the cab **20** to house the prime mover (e.g., the motor **14**) and various other vehicle subsystems (e.g., oil systems, HVAC systems, etc.)

The passenger compartment **22** is positioned behind the cab **20** on the vehicle chassis **12**. The passenger compartment **22** is defined by a larger volume than the cab **20**, and can be used to house various types of medical equipment, for example, to administer care to injured or wounded personnel at or while driving away from an incident location. Each of the cab **20** and passenger compartment **22** can be defined by an outer, armored steel plate construction. The cab **20** and the passenger compartment **22** can be joined together so that an internal passageway is formed between the cab **20** and the passenger compartment **22**. Accordingly, personnel within the vehicle **10** can travel between the cab **20** and the passenger compartment **22** without exiting the vehicle **10**.

With additional reference to FIGS. **2**A and **2**B, the interior of the passenger compartment **22** within the vehicle body **18** is shown. The passenger compartment **22** is defined by a floor **24**, a roof **26**, and sidewalls **28** including a front wall **30** and a rear wall **32** extending between the floor **24** and the roof **26**. The passenger compartment **22** has a generally rectangular perimeter, and can be accessed through both the rear wall **32** and the front wall **30**. In other embodiments, the passenger compartment **22** is accessible through a sidewall or vertically (e.g., through the roof **26**). The passenger compartment **22** can be formed of plate steel or steel alloy that provides additional armor to the vehicle **10**. In some examples, the sidewalls **28** are formed of aluminum or aluminum alloy material to reduce an overall weight of the vehicle **10**.

The passenger compartment **22** is designed to transport personnel and/or equipment. For example, seating can be provided within the interior of the passenger compartment **22** to help transport personnel within the passenger compartment **22**. As shown in FIG. **2**A, seating is provided around the perimeter of the passenger compartment **22**. In some examples, a command seat **34** is centered along the front wall **30** of the passenger compartment **22**. First and second perimeter seats **36**, **38** can be positioned along the sidewalls **28** near the front of the passenger compartment **22** as well.

Litter support systems **40** can be positioned along each sidewall **28**, extending away from the rear wall **32** of the vehicle body **18**. The litter support systems **40** can each rotate between a stowed position (shown in FIG. **2**A) and a deployed position (shown in FIGS. **2**B, **4**A-**4**B). In the stowed position, the litter support system **40** provides an array of seatbacks **42** that create ambulatory seating for one or more people, such that the vehicle **10** can be used to transport several people within the passenger compartment **22** simultaneously. In the deployed position, the array of seatbacks **42** is rotated downward, toward the floor **24**, exposing a frame **44** that can support one or more litters **80** and/or patients on litters **80**. The seatbacks **42** can be constructed to move individually or as a group.

With additional reference to FIGS. **2**B-**4**B, rear loading mechanisms **52** and the litter support systems **40** are shown in the deployed position. With the array of seatbacks **42** folded downward, the frame **44** extends approximately parallel to the floor **24** of the vehicle **10**. The frame **44** includes a base **46** that is mounted to the rear side of the array of seatbacks **42**. As shown in FIGS. **4**A-**4**B, the base **46** includes two channels **48**, **50** spaced apart from one another to define parallel tracks that extend approximately the entire length of the seatback array **42**. The parallel tracks are sized and positioned to slidably receive the feet **84** that extend downward from the frame **82** of a litter **80**.

Litters **80** can be loaded onto the litter support system **40** through a rear loading mechanism **52**, shown in FIG. **3**. The

rear loading mechanism **52** can be mounted to rear doors **54**, **56** formed in the rear wall **32** of the passenger compartment **22**, for example, and can be deployed when the rear doors **54**, **56** are opened to allow external access into the passenger compartment **22**. Like the litter support systems **40**, the rear loading mechanism **52** includes two channels **58**, **60** extending along a length of the rear doors **54**, **56**. The channels **58**, **60** of the rear loading mechanism **52** are aligned with the channels **48**, **50** of the litter support system **40**, which promotes an efficient litter loading process.

To load a litter **80** into the litter support system **40** within the passenger compartment **22**, the litter **80** is lifted from the ground. The front legs **84** of a litter **80** can first be loaded into the channels **58**, **60** of the rear loading mechanism **52** and then slid upward, at an acute angle to the floor **24** and channels **48**, **50**, until the rear legs **84** are also received within the channels **58**, **60**. The spacing between the channels **58**, **60** of the rear loading mechanism **52** and the channels **48**, **50** of the litter support system **40** is limited so that once the front legs **84** of a litter **80** pass upwardly and outwardly beyond the channels **58**, **60**, the litter **80** rotates toward a position parallel to the floor **24** of the passenger compartment **22**. The rotation of the litter **80** toward the floor **24** rotates the front legs **84** of the litter **80** into the channels **48**, **50** of the litter support system **40**. The litter **80** can then be urged further forward until the rear legs **84** of the litter **80** are also received within the channels **48**, **50** of the litter support system **40**. With front and rear legs **84** within the channels **48**, **50** of the litter support system **40**, the litter **80** can be slid forward within the passenger compartment **22** until the litter **80** is received entirely within the passenger compartment **22**. After a successful litter loading process is performed, the rear doors **54**, **56** can be rotated upward and secured to the rear wall **32** of the passenger compartment **22**.

Litters **80** received upon the frame **44** of the litter support system **40** can be elevated off the frame **44** so that additional litters and/or personnel can be secured within the passenger compartment **22** of the vehicle **10**. As shown in FIGS. **4A-4B**, a litter lift system **100** can be positioned at least partially within the passenger compartment **22** of the vehicle body **18** and can be used to suspend and/or lift one or more litters off the litter support system **40** and floor **24** to increase the patient capacity of the vehicle **10** relative to other ambulance style vehicles.

As depicted in FIGS. **4A-7**, the litter lift system **100** generally includes a winch system **102** and a lifting strap **104** that is coupled to the winch system **102**. The winch system **102** includes a spool **103** that is driven by an electric motor **105**. The electric motor **105** includes a shaft which rotates the spool **103** of the winch system **102** to wind or unwind the lifting strap **104**. In some examples, the winch system **102** is coupled to the roof **26** of the vehicle body **22**. In other embodiments, the winch system **102** is driven using alternative winding mechanisms (e.g., with a hydraulic motor, with a pneumatic motor, with a manual crank, etc.). Winding the winch system **102** (e.g., rotating the winch system **102**) alters the amount of lifting strap **104** extending away from the winch system **102**, which in turn adjusts a vertical position of the lifting strap **104** within the passenger compartment **22**.

The lifting strap **104** is designed to receive, support, and lift a litter **80** away from the floor **24** (or channels **48**, **50** of the base **46**) of the vehicle body **18**. With specific reference to FIG. **7**, a first end **108** of the lifting strap **104** is coupled to and wrapped around the spool **103** of the winch system **102**. Rotation of the winch system **102** causes the lifting strap **104** to spool or unspool from the winch system **102**, depending on the direction of rotation. For example, rotation in the spool **103** in the clockwise direction can cause the lifting strap **104** to wind onto the spool **103**, while rotation in the counterclockwise direction can cause the lifting strap **104** to unwind from the spool **103**. A second end **110** of the lifting strap **104** opposite the first end **108** forms a front lifting segment that is suspended into the passenger compartment **22**. In some examples, a second, rear lifting segment **112** extends downwardly away from the lifting strap **104** at an intermediate location between the first end **108** and the second end **110**. The rear or "intermediate" lifting segment **112**, like the front lifting segment at the second end **110**, is suspended into the passenger compartment **22** of the vehicle body **18**. The front lifting segment **110** and the rear lifting segment **112** can be arranged so that they each extend into the passenger compartment **22** of the vehicle body **18** to approximately (e.g., within 6 inches) the same vertical location. The winch system **102** is arranged so that the vertical location of the two lifting segments **110**, **112** changes at approximately the same rate (e.g., within 10 percent) as the winch system **102** winds or unwinds. Although described as a singular lifting strap **104**, various different embodiments of the lifting strap **104** can be used with the winch system **102**. For example, two or more independent lifting straps can be used in combination with the same winch system **102**.

The front lifting segment **110** and the rear lifting segment **112** each include a forked structure that is designed to interface with the frame **82** of a litter **80**. As depicted in FIG. **6**, the forked structures are each defined by a first segment **114** and a second segment **116** diverging away from a primary lifting segment **118**. The first segment **114** and second segment **116** each include loops **120** formed at distal ends (e.g., opposite the primary lifting segment **118**) of the segments **114**, **116**, which are sized and adapted to be received around the frame **82** of a litter **80**. By interfacing with the outer structure of the litter frame **82**, the forked ends of the lifting segments **110**, **112** balance the combined weight of the litter **80** and personnel within the litter **80** within the perimeter of the litter, which reduces the possibility of litter tipping.

FIGS. **5A-7** depict the routing of the lifting strap **104** within the vehicle body **18**. As indicated above, the winch system **102** is coupled to the vehicle body **18** (e.g., to the roof **26** of the passenger compartment **22** near the rear wall **32**, to the roof **26** of the passenger compartment **22** near the front wall, to a sidewall of the vehicle body **18**, etc.). The first end **108** of the lifting strap **104** is coupled to the spool **103** of the winch system **102**. The lifting strap **104** extends away from the winch system **102**, and angles upwardly, above a ceiling panel **62** positioned beneath and extending parallel to the roof **26** of the passenger compartment **22**, to a first roller **122**. The first roller **122** is mounted to the roof **26** of the passenger compartment **22**. The first roller **122** may at least partially assist in tensioning the lifting strap **104**. The first roller **122** can also be used to support the rear lifting segment **112**, which branches off from the lifting strap **104**, wraps around the first roller **122**, and is suspended downwardly away from the front side of the first roller **122** and into the passenger compartment **22** of the vehicle **10**.

The lifting strap **104** extends forward from the first roller **122**, above the ceiling panel **62** and approximately parallel to the floor **24** of the passenger compartment **22**, to a second roller **124**. The second roller **124**, like the first roller **122**, is mounted to the roof **26** of the passenger compartment **22**. The second end and front lifting segment **110** of the lifting strap **104** wraps around the second roller **124** and is sus-

pended downwardly, away from the front side of the second roller **124** and into the passenger compartment **22** of the vehicle **10**. As depicted in FIG. **7**, at least half of the lifting strap **104** extends above the ceiling panel **62** and parallel to the roof **26**.

The lifting strap **104** and winch system **102** are arranged so that only a portion of the lifting strap **104** is exposed within the passenger compartment **22** of the vehicle **10**. As depicted in FIG. **5**A, for example, the entirety of the lifting strap **104**, besides the front and rear lifting segments **110**, **112**, can be either positioned above the ceiling panel **62** of the passenger compartment **22** or behind a winch cover **126** that surrounds and conceals the winch system **102**. The front and rear lifting segments **110**, **112** can each extend downwardly through passageways **128**, **130** formed within the ceiling panel **62** of the passenger compartment **22**. The passageways **128**, **130** can be formed as elongate holes through the ceiling panel **62**, which are sized to form a clearance fit with the front and rear lifting segments **110**, **112** of the lifting strap **104**. In some examples, the passageways **128**, **130** are aligned with the first and second rollers **122**, **124** so that the front and rear lifting segments **110**, **112** can extend approximately vertically downward through the passageways **128**, **130** and into the passenger compartment **22** below. In some examples, however, the ceiling panel **62** can be uncoupled from the roof **26** or omitted entirely.

Using the litter lift system **100**, a litter **80** and associated patient can be elevated (e.g., off of the litter support system **40**, etc.), such that an additional litter **80** and patient can be accommodated upon the litter support system **40**. The operation of the litter lifting system **100** is demonstrated by FIGS. **4**A and **4**B with continued reference to FIGS. **5**A-**7**. Once a litter **80** is received upon the litter support system **40**, as shown in FIG. **4**A, the front and rear lifting segments **110**, **112** can be coupled to the litter **80**. The lifting loops **120** of the front lifting segment **110** and rear lifting segment **112** are positioned around opposite end portions of the frame **82** of the litter **80** to balance the litter **80**.

With the front and rear lifting segments **110**, **112** positioned in place around and coupled to the frame **82** of the litter **80**, the litter **80** can be raised away from the litter support system **40**. A user can then activate the winch system **102** and the electric motor **105** using a controller **132**, shown in FIGS. **8**A-**8**B, to begin the lifting process. In some examples, the controller **132** includes separate inputs that indicate a raising or lowering function to be performed by the winch system **102**. Upon pressing or otherwise inputting a command to the controller **132**, the electric motor **105** activates and rotates the spool **103** of the winch system **102**. For example, in response to a command to raise the lifting strap **104**, the winch system **102** rotates clockwise and begins to wrap the lifting strap **104** around the spool **103** of the winch system **102**. Wrapping the lifting strap **104** around the winch system **102** pulls the front and rear lifting segments **110**, **112** toward the winch system **102**, over the two rollers **122**, **124**. The retraction of the lifting segments **110**, **112** toward the winch system **102** reduces the amount of lifting strap suspended over each of the rollers **122**, **124**, which raises both the front and rear lifting segments **110**, **112** upwardly. By having each of the front and rear lifting segments **110**, **112** formed within the same lifting strap **104**, rotation of the winch system **102** causes both the front and rear lifting segments **110**, **112** to raise and lower at an approximately equal (e.g., within about 10%) rate when the spool **103** rotates. Accordingly, the front and rear lifting segments **110**, **112** remain suspended downward at approximately the same (e.g., within about 6 inches) distance from the rollers **122**, **124**. When not in use, the controller **132** can be received upon a support **146** formed on the rear wall **32** of the passenger compartment **22**.

The litter **80** and lifting strap **104** can be raised by the winch system **102** until a suitable height for the litter **80** is reached within the passenger compartment. Once a desired height is reached, support arms **134** can be positioned in place beneath the litter frame **82**, as shown in FIG. **4**B. The support arms **134** can be coupled to the sidewalls **28** using brackets **136**. In one embodiment, the support arms **134** are rotatable relative to the brackets **136**. The support arms **134** have a generally arcuate shape to cradle a litter **80**. Once the litter frame **82** is locked into place relative to the rotatable support arms **134**, an operator may use the controller **132** to lower the lifting strap **104**, which releases some of the tension on the lifting strap **104** and allows the weight of the litter and personnel within the litter to be carried by the support arms **134**.

With the litter **80** positioned on the support arms **134** and raised away from the litter support structure **40** below, a second litter can then be received on the litter support structure **40**, allowing the vehicle **10** to accommodate multiple litter patients simultaneously. With litter lifting systems **100** positioned on each side of the passenger compartment, up to four (or in some cases, more) litter patients can be received simultaneously within the vehicle **10** and transported away from an incident location. Upon arrival at a hospital or other facility, the litter **80** can once again be suspended and lowered down toward the litter support structure **40** using the lifting strap **104** and winch system **102**, which unspools the lifting strap **104** and lowers the litter **80** in response to receiving a command from the controller **132**.

When the litter lift system **100** is not in use and not needed, compact storage features can be used to further limit requirements of the litter lift system **100**. In some examples, a coupling is positioned on each of the front and rear lifting segments **110**, **112** to stow the suspended portions of the lifting strap **104** when not in use. For example, the coupling can be a metallic component **142** (e.g., iron) that is incorporated (e.g., sewn) into each of the first and second segments **114**, **116** of the front and rear lifting segments **110**, **112**. The metallic component **142** can be adapted to releasably couple with opposing magnets **144** positioned on the ceiling panel **62** of the passenger compartment **22**. By coupling the metallic components **142** with the opposing magnets **144**, the lifting strap **104** can be confined to an area immediately adjacent to the ceiling panel **62**, out of the way of passengers moving around within the passenger compartment **22**. Alternatively, the couplings can be hooks or fastener panels (e.g., hook and loop fastener panels) that are attached to the front and rear lifting segments **110**, **112** to releasably secure the front and rear lifting segments **110**, **112** to the ceiling panel **62** when the litter lifting system **100** is not in use.

Referring to FIGS. **10**-**11**, the passenger compartment **22** is shown as a reconfigurable compartment **1000** (e.g., a body, a compartment, a container, a vehicle body, a cab, a carrier, etc.), according to another embodiment. The reconfigurable compartment **1000** can be implemented as the passenger compartment **22** of the vehicle **10** and is configured to be transitioned between different configurations, modes, functions, etc., to transition the vehicle **10** between different overall functions, modes, etc. In some embodiments, transitioning the reconfigurable compartment **1000** between the different configurations is performed by replacing one or more panels of the reconfigurable compartment

1000 to change a function, use, or components of the reconfigurable compartment **1000**, thereby transitioning the vehicle **10** between different modes, types of vehicle, configurations, overall functions, etc. For example, the reconfigurable compartment **1000** may be transitionable between a passenger or troop carrier compartment (e.g., with increased seating capacity for transporting troops), an ambulance compartment (e.g., for transporting injured troops and medics), a communications vehicle (e.g., including communications equipment), a multi-mission tactical wheeled vehicle, etc.

The reconfigurable compartment **1000** as shown in FIGS. **10** and **11** includes multiple panels, walls, members, plates, etc., shown as walls **1002** that are secured, fastened, etc., or otherwise removably coupled with each other to form the reconfigurable compartment **1000** and defining an interior volume **1004** within which passengers, troops, equipment, etc., can be positioned. In particular, the reconfigurable compartment includes a top wall **1002***a* (e.g., a roof), a front wall **1002***b*, a first side wall **1002***c*, a rear wall **1002***d*, a second side wall **1002***e*, and a bottom wall **1002***f* (e.g., a floor). In some embodiments, at least one of the top wall **1002***a*, the front wall **1002***b*, the first side wall **1002***c*, the rear wall **1002***d*, the second side wall **1002***e*, or the bottom wall **1002***f* are universal and are configured for use with all of the different modes, configurations, functions, etc., of the reconfigurable compartment **1000** as described herein. In particular, the top wall **1002***a*, the bottom wall **1002***f*, the first side wall **1002***b*, and the second side wall **1002***e* may be universal walls that are usable with any of the different functions or configurations of the reconfigurable compartment **1000** as described herein.

The reconfigurable compartment **1000** can be transitionable into an ambulance compartment (e.g., the passenger compartment **22** including the litter lift system **100** as described in greater detail above with reference to FIGS. **1-9**) by removing and replacing the front wall **1002***b* and/or the rear wall **1002***d* with an ambulance-specific wall that includes or is configured to support the litter lift system **100** (e.g., the front wall **30**, the rear wall **32**, etc.). In this way, the reconfigurable compartment **1000** can be transitioned into an ambulance vehicle by removing and replacing an appropriate one of the walls **1002** with an ambulance or litter lift specific wall **1002**.

The reconfigurable compartment **1000** can be transitioned into a troop carrier compartment by removing one or more of the walls **1002** and replacing with troop carrier specific walls. For example, first side wall **1002***c* and the second side wall **1002***e* may be replaceable with troop-carrier specific first and second side walls that include or are configured to receive seating arrangement (e.g., benches, bucket seats, etc.) for troops (e.g., 6 or more troops).

The reconfigurable compartment **1000** can be transitioned into a communications vehicle compartment by removing and replacing one or more of the walls **1002** with communications specific walls that include or are configured to receive various communications equipment. In some embodiments, the front wall **1002***b* and the back wall **1002***d*, or the first side wall **1002***c* and the second side wall **1002***e* are removable and replaceable with walls that are function-specific for communications (e.g., that include or are configured to receive communications equipment).

Advantageously, the reconfigurable compartment **1000** can be transitioned into different functions by replacing one or more of the walls **1002** with function-specific walls that include or are configured to support various equipment, devices, etc., to transition an overall function of the reconfigurable compartment **1000** and thereby transition the vehicle **10** between different types of vehicles having different functions, overall purposes, different functional abilities, etc. A reconfigurable compartment **1000** facilitates transitioning an existing vehicle **10** into a different type of vehicle **10**. For example, the vehicle **10** may be configured as an ambulance and, if a troop carrier is required, may be returned to a base or a hanger and transitioned into a troop carrier for transportation of troops. Advantageously, the reconfigurable compartment **1000** provides a versatile compartment that can be used to change the vehicle **10** between different types of vehicles for different mission purposes.

The reconfigurable compartment **1000** can be configured to fasten with the chassis **12** the same as or similar to the passenger compartment **22** as described in greater detail above with reference to FIG. **1**. In some embodiments, the reconfigurable compartment **1000** is positioned rearward of the cab **20** with the front wall **1002***b* being directly behind the cab **20**, and the rear wall **1002** defining a back end of the vehicle **10**. The reconfigurable compartment **1000** can be similar to or share any features with the passenger compartment **22** as described in greater detail above with reference to FIGS. **1-9**. The reconfigurable compartment **1000** or walls **1002** thereof may be armored or un-armored in any of the configurations described herein.

Referring to FIG. **12**, a process **1200** for transitioning a military vehicle between different modes, functions, overall functions, etc., includes steps **1202-1206**, according to an exemplary embodiment. The process **1200** can be performed to transition the vehicle **10** between different modes, different overall functions, or to generally reconfigure the vehicle **10** into a different type of vehicle.

The process **1200** includes providing a military vehicle having a reconfigurable compartment (step **1202**), according to some embodiments. The military vehicle may be the vehicle **10**. The reconfigurable compartment can be the reconfigurable compartment **1000** as described herein with reference to FIGS. **10** and **11**. The reconfigurable compartment can include or have a floor, a front, a rear, a roof, and sides. The floor, front, rear, roof, and sides may be removably coupled with each other to define the reconfigurable compartment.

The process **1200** includes removing at least one of the walls of the reconfigurable compartment (step **1204**), according to some embodiments. The step **1204** can include removing a floor, a roof, one or more sides, a front, a rear, etc., of the reconfigurable compartment by unfastening or otherwise removing the floor, roof, one or more sides, front, rear, etc., from adjacent walls.

The process **1200** includes replacing the at least one walls of the reconfigurable compartment with function-specific walls to change a function of the reconfigurable compartment and an overall function of the military vehicle (step **1206**), according to some embodiments. In some embodiments, step **1206** includes installing a function-specific wall with the one or more of the walls that are removed in step **1204**. The function-specific walls can include or be configured to receive, interface with, etc., various equipment for use when the military vehicle is transitioned into a different overall mode or function.

Although this description may discuss a specific order of method steps, the order of the steps may differ from what is outlined. Also two or more steps may be performed concurrently or with partial concurrence. Such variation will depend on the software and hardware systems chosen and on designer choice. All such variations are within the scope of the disclosure.

As utilized herein, the terms "approximately", "about", "substantially", and similar terms are intended to have a broad meaning in harmony with the common and accepted usage by those of ordinary skill in the art to which the subject matter of this disclosure pertains. It should be understood by those of skill in the art who review this disclosure that these terms are intended to allow a description of certain features described and claimed without restricting the scope of these features to the precise numerical ranges provided. Accordingly, these terms should be interpreted as indicating that insubstantial or inconsequential modifications or alterations of the subject matter described and claimed are considered to be within the scope of the invention as recited in the appended claims.

It should be noted that the term "exemplary" as used herein to describe various embodiments is intended to indicate that such embodiments are possible examples, representations, and/or illustrations of possible embodiments (and such term is not intended to connote that such embodiments are necessarily extraordinary or superlative examples).

The terms "coupled," "connected," and the like, as used herein, mean the joining of two members directly or indirectly to one another. Such joining may be stationary (e.g., permanent, etc.) or moveable (e.g., removable, releasable, etc.). Such joining may be achieved with the two members or the two members and any additional intermediate members being integrally formed as a single unitary body with one another or with the two members or the two members and any additional intermediate members being attached to one another.

References herein to the positions of elements (e.g., "top," "bottom," "above," "below," "between," etc.) are merely used to describe the orientation of various elements in the figures. It should be noted that the orientation of various elements may differ according to other exemplary embodiments, and that such variations are intended to be encompassed by the present disclosure.

It is important to note that the construction and arrangement of the litter lift system as shown in the exemplary embodiments is illustrative only. Although only a few embodiments of the present disclosure have been described in detail, those skilled in the art who review this disclosure will readily appreciate that many modifications are possible (e.g., variations in sizes, dimensions, structures, shapes and proportions of the various elements, values of parameters, mounting arrangements, use of materials, colors, orientations, etc.) without materially departing from the novel teachings and advantages of the subject matter recited. For example, elements shown as integrally formed may be constructed of multiple parts or elements. It should be noted that the elements and/or assemblies of the components described herein may be constructed from any of a wide variety of materials that provide sufficient strength or durability, in any of a wide variety of colors, textures, and combinations. Accordingly, all such modifications are intended to be included within the scope of the present inventions. Other substitutions, modifications, changes, and omissions may be made in the design, operating conditions, and arrangement of the preferred and other exemplary embodiments without departing from scope of the present disclosure or from the spirit of the appended claims.

What is claimed is:

1. A military vehicle comprising:

a frame;

a cab coupled with the frame, the cab comprising a first plurality of panels configured to define a first interior volume for a driver of the military vehicle; and

a vehicle body supported by the frame, the vehicle body including a compartment comprising a second plurality of panels, the second plurality of panels removably coupled with each other to cooperatively define a second interior volume, the second interior volume physically separated from the first interior volume by at least one physical barrier;

wherein at least one of the second plurality of panels of the compartment are replaceable with function-specific panels to transition the compartment between at least a troop carrier compartment and an ambulance compartment to change an application of the military vehicle, each of the function-specific panels having a different structure specific for at least the troop carrier compartment or the ambulance compartment, wherein the first interior volume of the cab is physically separated from the second interior volume of the compartment when the compartment is transitioned into the troop carrier compartment and when the compartment is transitioned into the ambulance compartment, and both the troop carrier compartment and the ambulance compartment include a ceiling panel that extends a longitudinal length substantially equal to the vehicle body.

2. The military vehicle of claim **1**, wherein the second plurality of panels comprise a floor, a front, a rear, the ceiling panel, and sides.

3. The military vehicle of claim **2**, wherein the rear is replaceable to transition the overall function of the vehicle between the plurality of overall functions.

4. The military vehicle of claim **2**, wherein at least one of the floor, the front, the rear, the ceiling panel, or one or the sides are universal and configured for use with all of the plurality of overall functions of the vehicle.

5. The military vehicle of claim **1**, wherein the troop carrier compartment comprises seating for at least six passengers for transportation in the troop carrier compartment.

6. The military vehicle of claim **1**, wherein the ambulance compartment comprises:

a litter lift system positioned at least partially within the ambulance compartment comprising:

a motor-driven winch having a rotatable spool; and

a lifting strap having one end coupled to the rotatable spool and being movable in response to rotation of the rotatable spool, the lifting strap having a first lifting segment and a second lifting segment positioned away from the end of the lifting strap coupled to the rotatable spool, wherein the first lifting segment and the second lifting segment are each forked to define two separate lifting loops;

wherein rotation of the rotatable spool in a first direction raises the first lifting segment and the second lifting segment; and

wherein rotation of the rotatable spool in a second direction different from the first direction lowers the first lifting segment and the second lifting segment.

7. A reconfigurable compartment for a military vehicle comprising:

a vehicle body including a floor, a front, a rear, a roof, and sides, wherein the floor, the front, the rear, the roof, and the sides are removably coupled with each other to define the reconfigurable compartment and an interior volume of the compartment, the interior volume of the compartment physically separated from an interior volume of a cabin for a driver of the military vehicle, the

cabin comprising a plurality of panels different than the vehicle body that define the interior volume of the cabin;

wherein at least one of the floor, the front, the rear, the roof, or the sides are function-specific and replaceable with a different function-specific at least one of the floor, the front, the rear, the roof, or the sides to change an overall function of the military vehicle between at least an ambulance compartment and a troop carrier compartment, wherein the function-specific or the different function specific at least one of the floor, the front, the rear, the roof, or the sides comprise a different structure for at least the ambulance compartment or the troop carrier compartment, wherein the interior volume of the cabin is physically separated from the interior volume of the compartment when the compartment is transitioned into the ambulance compartment and when the compartment is transitioned into the troop carrier compartment, and both the ambulance compartment and the troop carrier compartment include the roof that extends substantially an entirety of a longitudinal length of the vehicle body.

8. The reconfigurable compartment of claim **7**, wherein at least one of the floor, the front, the rear, the roof, or the sides are universal and configured for use with all of the plurality of overall functions of the vehicle, regardless of which of the function-specific at least one of the floor, the front, the rear, the roof, or the sides is installed.

9. The reconfigurable compartment of claim **7**, wherein replacing the at least one function-specific floor, front, rear, roof, or sides with the different function-specific at least one floor, front, rear, roof, or sides changes a function of the reconfigurable compartment to change the overall function of the military vehicle.

10. The reconfigurable compartment of claim **7**, wherein the troop carrier compartment comprises seating for at least six passengers for transportation in the troop carrier compartment.

11. The reconfigurable compartment of claim **7**, wherein the ambulance compartment comprises:

a litter lift system positioned at least partially within the ambulance compartment comprising:

a motor-driven winch having a rotatable spool; and

a lifting strap having one end coupled to the rotatable spool and being movable in response to rotation of the rotatable spool, the lifting strap having a first lifting segment and a second lifting segment positioned away from the end of the lifting strap coupled to the rotatable spool, wherein the first lifting segment and the second lifting segment are each forked to define two separate lifting loops;

wherein rotation of the rotatable spool in a first direction raises the first lifting segment and the second lifting segment; and

wherein rotation of the rotatable spool in a second direction different from the first direction lowers the first lifting segment and the second lifting segment.

12. A method of transitioning a military vehicle between a plurality of different modes, the method comprising:

providing a military vehicle comprising a reconfigurable compartment having a floor, a front, a rear, a roof, and sides, wherein the front, the rear, the roof, and the sides are removably coupled with each other to define the reconfigurable compartment and a completely enclosed interior volume of the reconfigurable compartment, the reconfigurable compartment separate from a cab of the military vehicle that provides seating for a driver of the military vehicle, the cab of the military vehicle defined by a plurality of panels that are different from the reconfigurable compartment, an interior volume of the cab physically separated from the enclosed interior volume by at least one physical barrier;

removing a function-specific one of the floor, the front, the rear, the roof, or the sides, the function-specific one of the floor, the front, the rear, the roof, or the sides having ambulance structure so that the reconfigurable compartment is an ambulance compartment;

replacing the function-specific one of the floor, the front, the rear, the roof, or the sides with a different function-specific one of the floor, the front, the rear, the roof, or the sides, the different function-specific one of the floor, the front, the rear, the roof, or the sides comprising troop carrier structure to transition the reconfigurable compartment to a troop carrier compartment, wherein transitioning the reconfigurable compartment between the ambulance compartment and the troop carrier compartment transitions the military vehicle between an ambulance and a troop carrier, wherein the interior volume of the cab is physically separated from the completely enclosed interior volume of the reconfigurable compartment when the reconfigurable compartment is transitioned into the troop carrier compartment and when the compartment is transitioned into the ambulance compartment, and both the troop carrier compartment and the ambulance compartment include the roof that extends a longitudinal length substantially equal to the vehicle body.

13. The method of claim **12**, wherein at least one of the floor, the front, the rear, the roof, or one or the sides are universal and configured for use with all of the plurality of overall functions of the vehicle.

14. The method of claim **13**, wherein the roof is universal for each of the troop carrier compartment and the ambulance compartment.

15. The method of claim **12**, wherein the function-specific one of the floor, the front, the rear, the roof, or the sides is the rear.

16. The method of claim **12**, wherein the troop carrier compartment comprises seating for at least six passengers for transportation in the troop carrier compartment.

17. The method of claim **12**, wherein the ambulance compartment comprises:

a litter lift system positioned at least partially within the ambulance compartment comprising:

a motor-driven winch having a rotatable spool; and

a lifting strap having one end coupled to the rotatable spool and being movable in response to rotation of the rotatable spool, the lifting strap having a first lifting segment and a second lifting segment positioned away from the end of the lifting strap coupled to the rotatable spool, wherein the first lifting segment and the second lifting segment are each forked to define two separate lifting loops;

wherein rotation of the rotatable spool in a first direction raises the first lifting segment and the second lifting segment; and

wherein rotation of the rotatable spool in a second direction different from the first direction lowers the first lifting segment and the second lifting segment.

* * * * *